

WAAS CH 56402 W35A	APP CRS 346°	Rwy Ldg TDZE 499 Apt Elev 505
--	------------------------	---

RNAV (GPS) RWY 35

REDDING RGNL (RDD)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Circling Rwy 13 NA at night. Rwy 35 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV all Cats. LNAV/VNAV minimums: For inop ALS, increase visibility all Cats to ¾ SM. LNAV minimums: For inop ALS, increase visibility all Cats to 1 SM.


MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 5000 direct ITMOR, continue climb-in-hold to 5000.

ATIS 124.1	OAKLAND CENTER 132.2 350.3	REDDING TOWER ★ 119.8(CTAF) 0 269.25	GND CON 121.7	UNICOM 122.95
----------------------	--------------------------------------	--	-------------------------	-------------------------

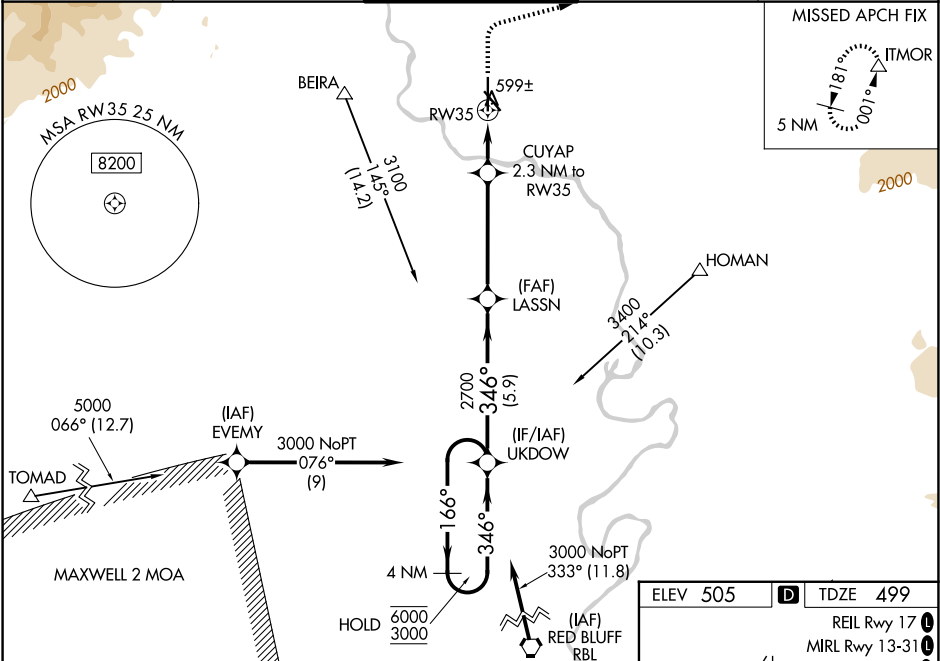

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).		1700	5000	ITMOR
UKDOW		LASSN	CUYAP	1 NM to RW35		
6000 ← 166°		2700	2.3 NM to RW35	1 NM to RW35		
3000 → 346°		1260	1 NM to RW35	1 NM to RW35		
GP 3.00°		5.9 NM	4.5 NM	1.3 NM	1 NM	
TCH 52						
CATEGORY	A	B	C	D		
LPV DA		749-¾	250 (300-¾)			
LNAV/VNAV DA		768-¾	269 (300-¾)			
LNAV MDA		860-¾	361 (400-¾)			
CIRCLING	960-1 455 (500-1)	1000-1 495 (500-1)	1120-1¾ 615 (700-1¾)	1340-2¾ 835 (900-2¾)		

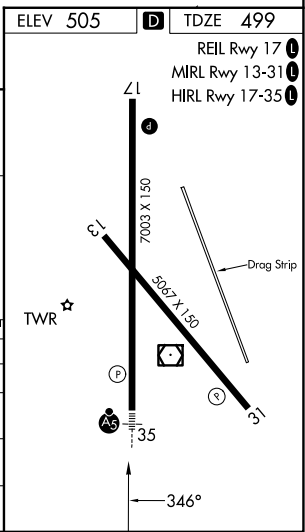

SW-2, 01 OCT 2026 to 29 OCT 2026

SW-2, 01 OCT 2026 to 29 OCT 2026