


ILS or LOC/DME RWY 27

LOC I-VOK 108.5	APCH CRS 269°	Rwy ldg THRE Arprt Elev 9000 904 912	[USAF]	VOLK FLD (KVOK)
* When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1½ miles.			ALSF-1	MISSED APPROACH: Climb to 2200, then climbing left turn to 4000 via DLL VORTAC R-304 direct DLL and hold.
ATIS 134.35 257.85	APP CON 135.25 244.875	TOWER ★ 127.5 0 (CTAF) 239.25 0	GND CON 121.9 275.8	

*** Circling NA South of Rwy 9-27.

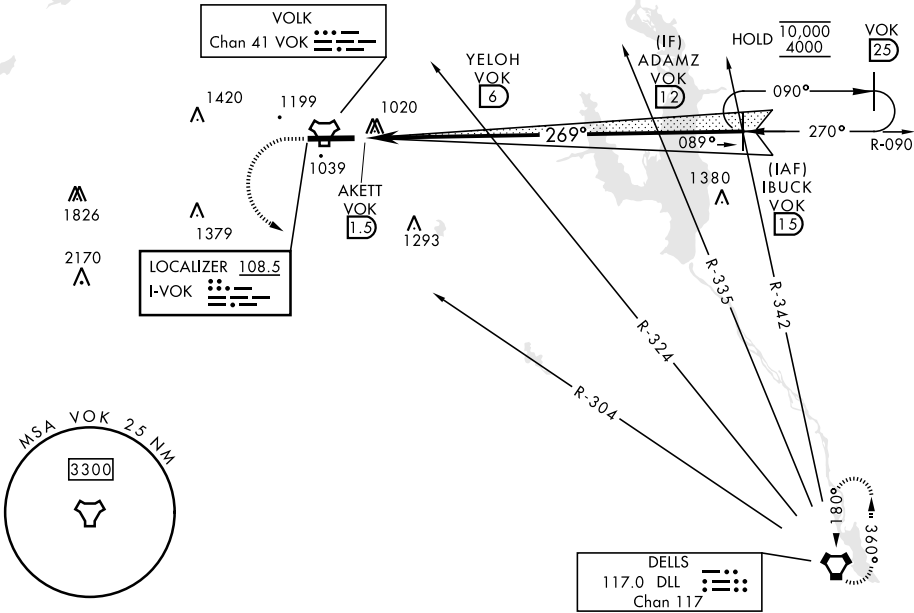

EMERG SAFE ALT 100 NM 4200

2200 ↑	4000 ↙	DLL R-304					
						GS 285° TCH 53	
0.5		4.5 NM					
CATEGORY	A	B	C	D	E		
S-ILS 27 *	1104/24		200	(200-½)			
S-LOC 27 **	1320/24	416 (500-½)	1320/40	416 (500-¾)			
CIRCLING ***	1400-1 488 (500-1)	1500-1 588 (600-1)	1500-1½ 588 (600-1½)	1500-2 588 (600-2)	1580-2¼ 668 (700-2¼)		

ELEV	912	D	THRE	904	
Diagram details: A horizontal line represents the runway, labeled '9000 x 150'. To the left of the runway is a circle with 'P' and 'A5'. To the right is a circle with 'P' and 'A1'. Above the runway is a shirt icon. Below the runway is a square icon labeled 'TWR'. Further below is a triangle icon labeled '1262' and a star icon. To the right of the runway is the text '27' and '269°'.					
HIRL Rwy 9-27 0					
FAF to MAP 4.5 NM					
Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30