

WAAS CH 82746	APP CRS 067°	Rwy Ldg TDZE 690 Apt Elev 690
-------------------------	------------------------	---

RNAV (GPS) RWY 7

ALPENA COUNTY RGNL (APN)

RNP APCH - GPS.



▼

⚠

Baro-VNAV and VDP NA when using PZQ altimeter setting. Rwy 7 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use PZQ altimeter setting and increase LPV DA to 1007 feet, increase LNAV/VNAV DA to 1039 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct MUNCN and hold, continue climb-in-hold to 3000.

ATIS ★ 120,675 327,05	ALPENA APP CON ★ 128,425 379,3	ALPENA TOWER ★ 121,35 (CTAF) 0 318,1	GND CON 121,9 275,8	UNICOM 122,95
---------------------------------	--	--	-------------------------------	-------------------------

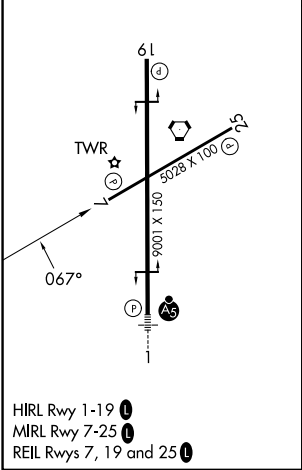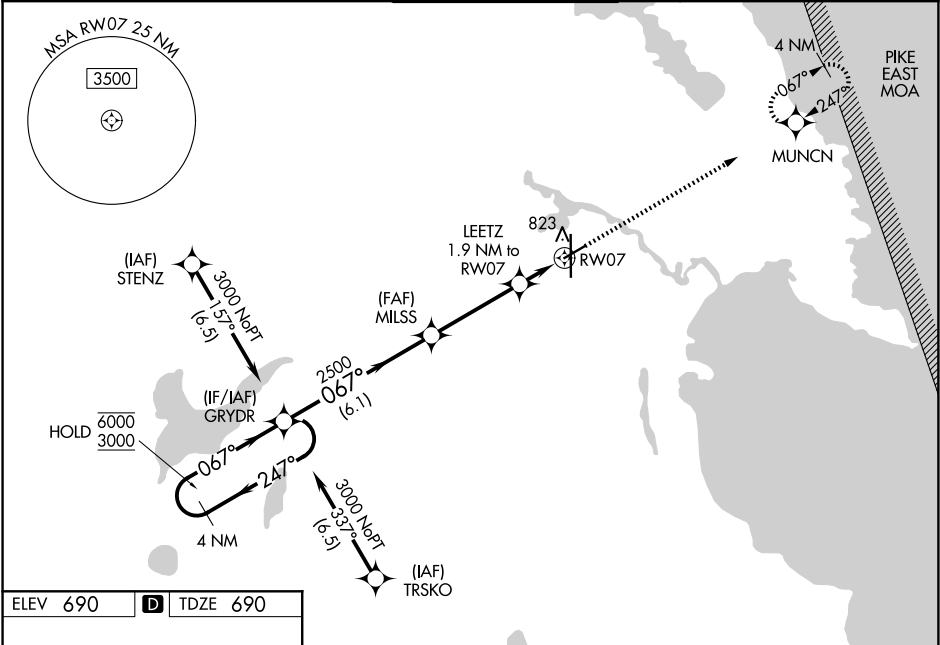

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 49).				3000	MUNCN
4 NM Holding Pattern GRYDR					
6000 ← 247° → 067° → 2500					
GP 3.00° TCH 58					
2500 1340					
6.1 NM 3.6 NM 0.8 1.1					
CATEGORY	A	B	C	D	
LPV DA	952-1		262 (300-1)		
LNAV/VNAV DA	984-1		294 (300-1)		
LNAV MDA	1080-1	390 (400-1)	1080-1½	390 (400-1½)	
CIRCLING	1140-1	450 (500-1)	1220-1½ 530 (600-1½)	1300-2 610 (700-2)	

EC-1, 01 OCT 2026 to 29 OCT 2026

EC-1, 01 OCT 2026 to 29 OCT 2026