

WAAS CH 63011 W19A	APP CRS 194°	Rwy Ldg 6750 TDZE 2468 Apt Elev 2504
--	------------------------	---

RNAV (GPS) RWY 19

RNP APCH - GPS.

T Baro-VNAV NA. For inop ALS, increase LNAV/VNAV all Cats
A visibilities to 1 SM. LNAV visibilities Cats C/D to $1\frac{3}{8}$ SM.


MALSR



MISSED APPROACH: Climb to 5900 direct WAGID and hold, continue climb-in-hold to 5900.

ASOS
121.55

CHARLESTON APP CON
125.4 269.125

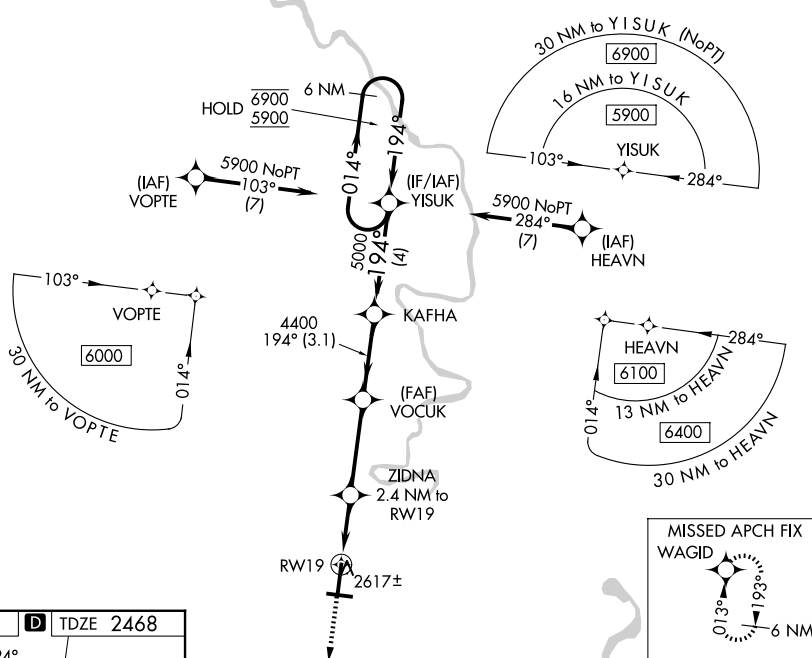
UNICOM
123.0 (CTAF) **L**

MISSED APCH FIX
WAGID




013° 193° 6 NM

ELEV 2504	D	TDZE 2468
-----------	----------	-----------

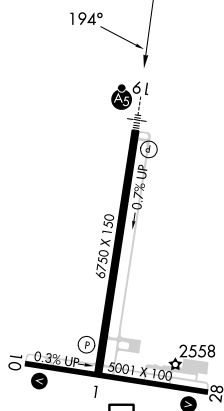

HIRL Rwy 1-19 **L**
MIRL Rwy 10-28 **L**
REIL Rwy 1, 10, and 28 **L**

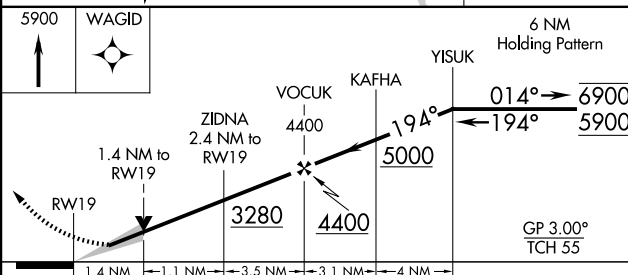

CATEGORY		A	B	C	D
LPV	DA	2688-½		220 (200-½)	
LNAV/ VNAV	DA	2818-⅝		350 (400-⅝)	
LNAV	MDA	2940-½ 472 (500-½)		2940-1 472 (500-1)	
CIRCLING		3120-1 616 (700-1)	3180-1 676 (700-1)	3320-2½ 816 (900-2½)	3500-3 996 (1000-3)