


ILS or LOC RWY 24

NORTHEAST ALABAMA RGNL (GAD)

MISSED APPROACH: Climb to 3600 on GAD VOR/DME R-231 to STAMP/GAD 10 DME and hold, continue climb-in-hold to 3600.

AWOS-3PT 127.825	BIRMINGHAM APP CON 125.45 279.65	CLNC DEL 120.05 257.7	UNICOM 122.725 (CTAF) 0
----------------------------	--	---------------------------------	-----------------------------------

DME REQUIRED

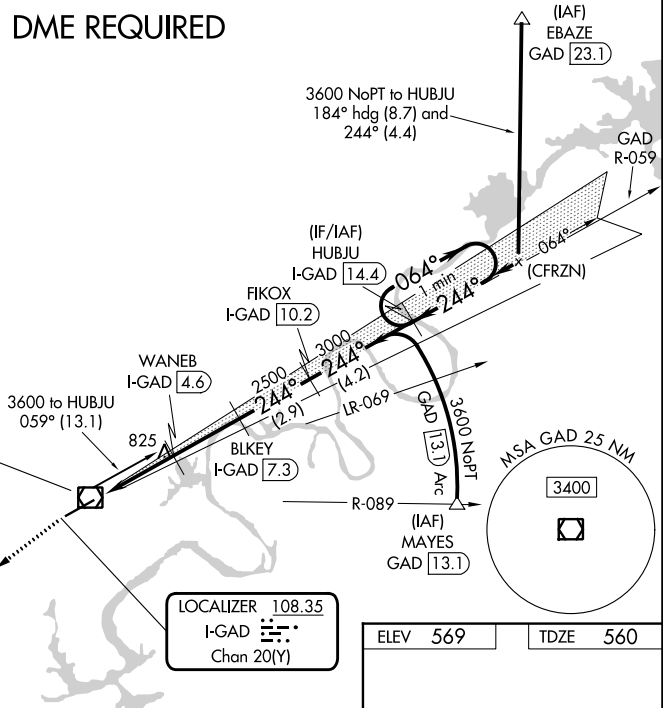

3600 ↑	GAD R-231	STAMP △	Use I-GAD DME when on the localizer course.		HUBJU I-GAD 14.4
*LOC only.			BLKEY I-GAD 7.3	FIKOX I-GAD 10.2	One Minute Holding Pattern
	WANEK I-GAD 4.6	2500			064° → 3600 ← 244°
	*I-GAD 3				GS 3.00° TCH 43
	I-GAD 1.3				
	1620*	2500			
	1.7 NM	1.6 NM	2.7 NM	2.9 NM	4.2 NM
CATEGORY	A	B	C	D	
S-ILS 24	779-3/4 219 (300-3/4)				
S-LOC 24	1140-1 580 (600-1)	1140-13/4 580 (600-13/4)			
CIRCLING	1140-1 571 (600-1)	1440-2 1/2 871 (900-2 1/2)		1680-3 1111 (1200-3)	

