


|                      |               |       |          |     |      |      |      |      |      |
|----------------------|---------------|-------|----------|-----|------|------|------|------|------|
| ATIS ★ 133.475 352.0 | SHL-903 [USN] | Rwy   | Knots    | 60  | 120  | 180  | 240  | 300  | 360  |
| CLNC DEL             |               | 24L/R | V/V(fpm) | 780 | 1560 | 2340 | 3120 | 3900 | 4680 |
| 125.975 254.325      |               |       |          |     |      |      |      |      |      |
| GND CON              |               |       |          |     |      |      |      |      |      |
| 128.625 307.325      |               |       |          |     |      |      |      |      |      |
| FOSS TOWER ★         |               |       |          |     |      |      |      |      |      |
| 135.2 298.925        |               |       |          |     |      |      |      |      |      |
| SOCAL DEP CON        |               |       |          |     |      |      |      |      |      |
| 119.6 363.1 W        |               |       |          |     |      |      |      |      |      |

ATC Climb Rate to 2000

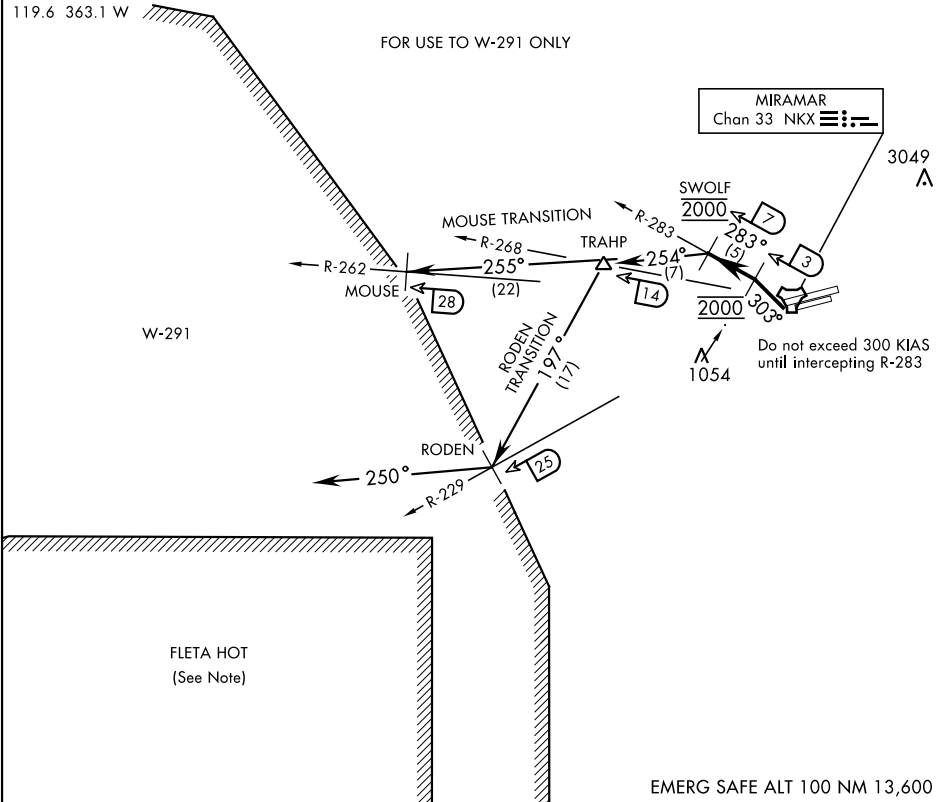

▼

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 24L/R: Climbing right turn to 2000 via heading 303° to intercept and proceed via NKX TACAN R-283 to SWOLF. Complete turn within NKX 2 DME. Cross NKX R-283/3 DME at 2000 mandatory. Maintain 2000 at SWOLF mandatory. Thence...

MOUSE TRANSITION (SWOLF9 • MOUSE): Turn left heading 255° to intercept NKX R-262 at MOUSE. Maintain 2000 for entry into W-291.

(Continued on next page)