

WAAS CH 77640 W35A	APP CRS 351°	Rwy Ldg 8599 TDZE 1089 Apt Elev 1110
--	------------------------	---

RNAV (GPS) RWY 35


RNP APCH.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LNAV/VNAV all CATs visibility to 7/8 SM.

MALSR

MISSED APPROACH: (Do not exceed 200K until WEGTE) Climb to 1520 then climbing left turn to 2700 direct WEGTE and hold.

ATIS 120.75	FORT SILL APP CON 120.55 322.4	LAWTON TOWER★ 127.05 257.8	GND CON 121.9	CTAF 119.9	UNICOM 122.95
-----------------------	--	--------------------------------------	-------------------------	----------------------	-------------------------

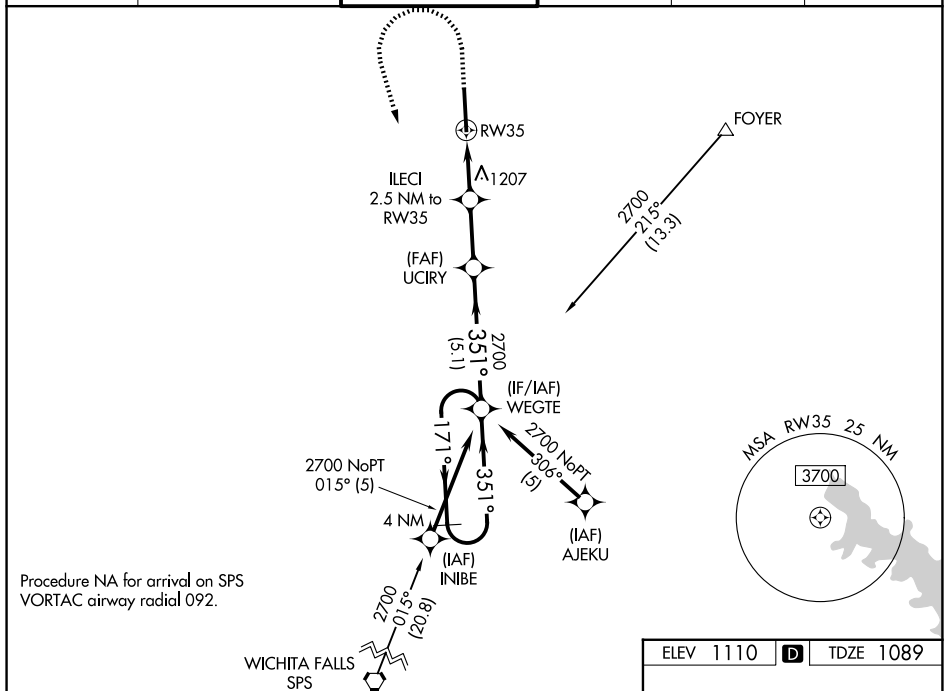

1520 2700 WEGTE

*LNAV only.

ILECI 2.5 NM to RW35

1.2 NM to RW35

RW35

1780*

UCIRY 2700

WEGTE

4 NM Holding Pattern

171° → 2700

← 351°

GP 3.00° TCH 55

1.2 NM 1.3 NM 2.4 NM 5.1 NM

CATEGORY	A	B	C	D
LPV DA		1289-1/2	200 (200-1/2)	
LNAV/VNAV DA		1376-1/2	287 (300-1/2)	
LNAV MDA	1520-1/2	431 (500-1/2)	1520-3/4	431 (500-3/4)
CIRCLING	1620-1	510 (600-1)	1820-2 710 (800-2)	1820-2 1/4 710 (800-2 1/4)