

|                                        |                        |                                                              |
|----------------------------------------|------------------------|--------------------------------------------------------------|
| WAAS<br>CH <b>82004</b><br><b>W05A</b> | APP CRS<br><b>050°</b> | Rwy Ldg <b>10960</b><br>TDZE <b>93</b><br>Apt Elev <b>93</b> |
|----------------------------------------|------------------------|--------------------------------------------------------------|

## RNAV (GPS) RWY 5

KINSTON RGNL JETPORT AT STALLINGS FLD (ISO)

RNP APCH - GPS.

**T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using GSB altitude setting. When local altimeter setting not received, use GSB altimeter setting and increase LPV DA to 336 feet; increase LNAV/VNAV DA to 523 feet and all visibilities to RVR 4000 increase all MDAs 60 feet and LNAV visibility Cat C/D/E to RVR 4500 and Circling visibility Cat E ¼ SM. For inop ALS, increase LPV Cat E visibility to RVR 4000; increase LNAV/VNAV and LNAV Cat E visibility to RVR 6000. For inop ALS when using GSB altimeter setting, increase LPV Cat E visibility to RVR 4000; increase LNAV/VNAV Cat E visibility to ¼ SM; increase LNAV Cat E visibility to 1 ½ SM.

\* RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using GSB altimeter setting).

MALSR  
A5

**MISSED APPROACH:**  
Climb to 2500 direct  
WINTI and hold.

AWOS-3  
132.75



SEYMOUR JOHNSON APP CON ★  
127.3 273.6

KINSTON TOWER ★  
120.6 (CTAF) **L** 335.5


GND CON  
**121.9**

UNICOM  
122.95

MISSED APCH FIX

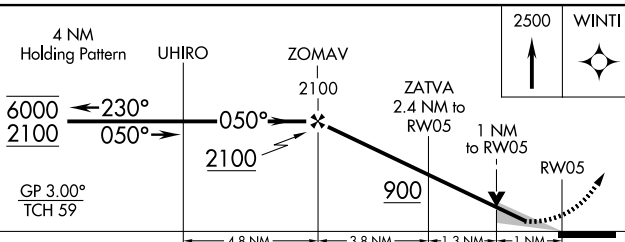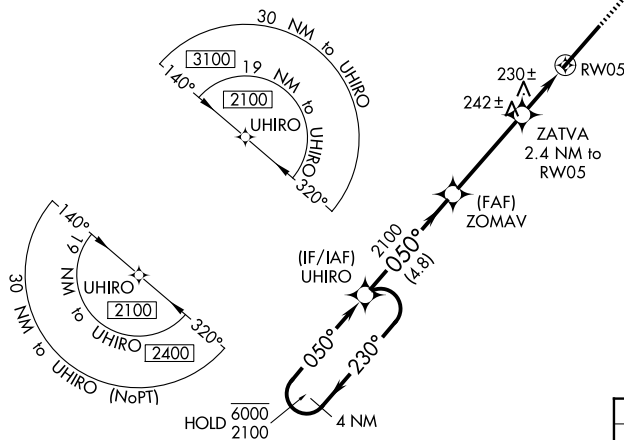

| CATEGORY         | A                    | B                    | C                      | D                    | E                      |
|------------------|----------------------|----------------------|------------------------|----------------------|------------------------|
| LPV DA *         | 293/24 200 (200-½)   |                      |                        |                      |                        |
| INAV/<br>VNAV DA | 480/35 387 (400-⅔)   |                      |                        |                      |                        |
| INAV MDA         | 480/24               | 387 (400-½)          | 480/35 387 (400-⅔)     |                      |                        |
| CIRCLING         | 540-1<br>447 (500-1) | 560-1<br>467 (500-1) | 700-1¾<br>607 (700-1¾) | 700-2<br>607 (700-2) | 780-2½<br>687 (700-2½) |

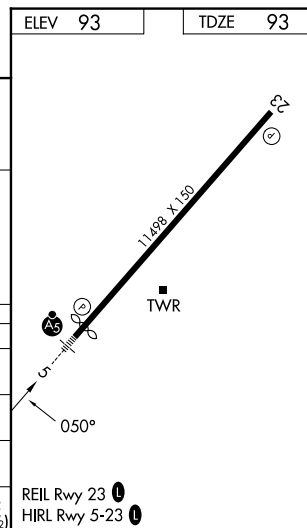

KINSTON, NORTH CAROLINA

Amdt 4 22JAN26

KINSTON RGNL JETPORT AT STALLINGS FLD (ISO)

35°20'N-77°37'W

RNAV (GPS) RWY 5

SE-2, 01 OCT 2026 to 29 OCT 2026

SE-2, 01 OCT 2026 to 29 OCT 2026