

ATIS 125.025
CLINC DEL 118
GND CON 12
PONTIAC TOW
120.5 (CTAF)

TAKEOFF MINIMUMS

Rwys 18, 36: NA - Environmental.
Rwys 9L/R, 27L/R: Standard.

RADAR required. DME required.

TOP ALTITUDE:
3000

NOTE: For use by non-RNAV equipped aircraft only.

NOTE: When using this departure, file the appropriate

depicted departure fix and route. Aircraft over

HARWL must file FL220 and below. Aircraft landing

Cleveland (CLE) must file MAARS transition.

Turbojet departures at/above 10000, maintain

280K until advised by ATC. If unable, advise ATC

SPECIAL INSTRUCTIONS:


For appropriate departure control frequency, see graphic.

Use frequency depicted within the sector where first unavaid/fix for your route is located (sectors indicated by dashed lines; frequencies in dashed box within)

(CONTINUED ON FOLLOWING PAGE)

EC-1, 01 OCT 2026 to 29 OCT 2026

NOTE: Chart not to scale.

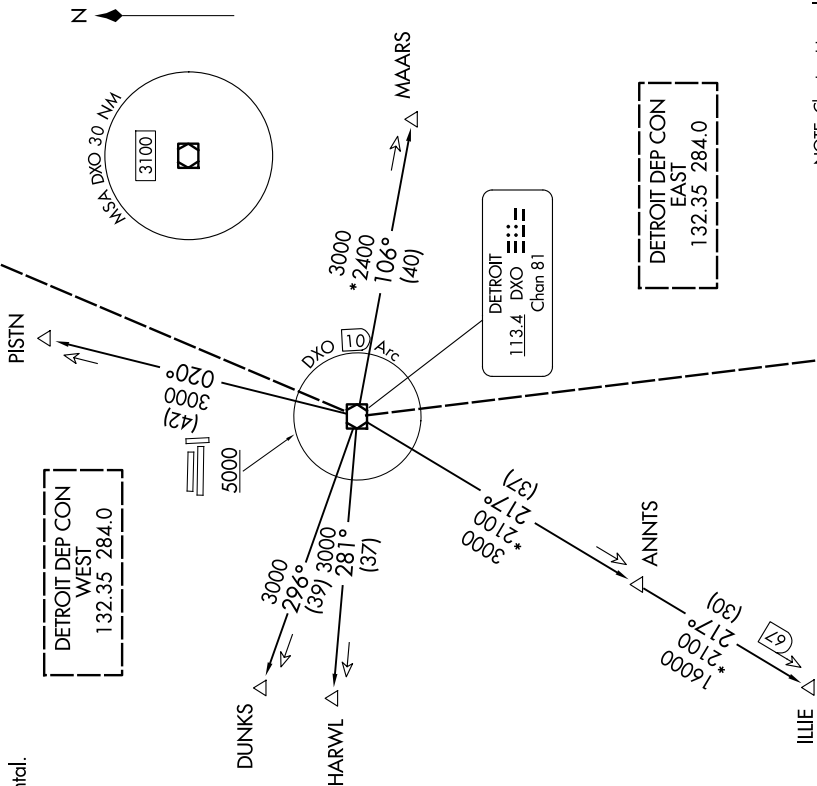

METRO FOUR DEPARTURE

(METRO4.DXO) 05SEP24

PONTIAC, MICHIGAN

OAKLAND COUNTY INTL (PTK)