



APP CRS	Rwy Ldg	6506
182°	TDZE	407
	Apt Elev	411

RNAV (GPS) RWY 18L

SOUTHERN ILLINOIS (MDH)

RNP APCH.		MALSR	MISSED APPROACH: Climb to 2700 direct SOPAW and hold.
	Circling Rwy 6, 36L NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.		

ATIS	KANSAS CITY CENTER	SOUTHERN TOWER ★	GND CON	UNICOM
119.725	127.475 346.275	125.35 (CTAF) 0 322.4	121.8	122.95

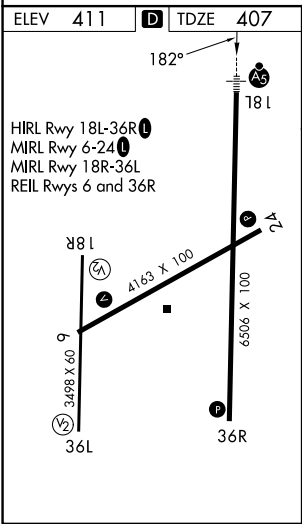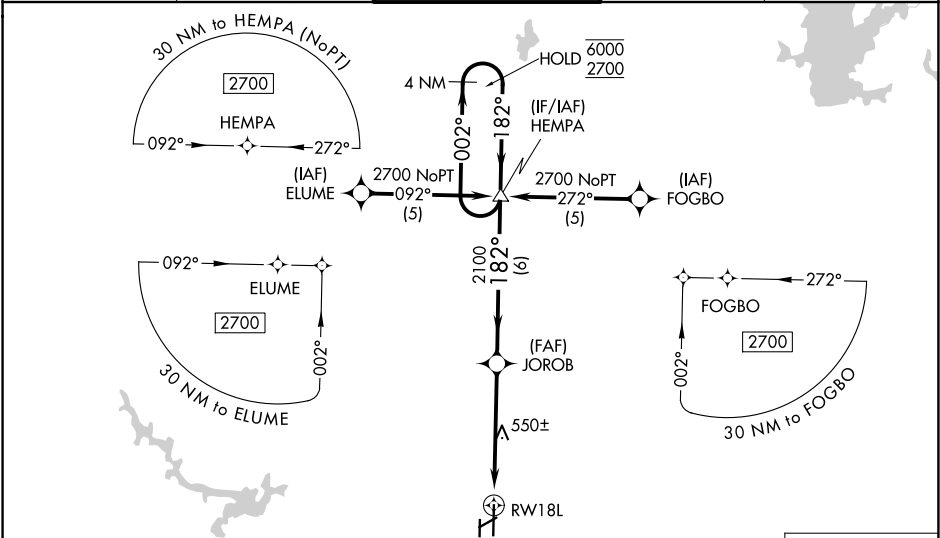

ELEV 411		TDZE 407
HIRL Rwy 18L-36R		MIRL Rwy 6-24L
MIRL Rwy 18R-36L		REIL Rwy 6 and 36R
*LNAV only		*1.1 NM to RWY18L
CATEGORY		A B C D
LNAV/VNAV DA		804-5/8 397 (400-5/8)
LNAV MDA		800-1/2 393 (400-1/2) 800-5/8 393 (400-5/8)
CIRCLING		900-1 489 (500-1) 920-1 509 (600-1) 1180-2 769 (800-2 1/4) 1180-2 769 (800-2 1/2)