

VOR TBN

110.0

APP CRS

329°

Rwy Ldg

5510

TDZE

1153

Apt Elev

1160

VOR RWY 33

WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (TBN)

DME or RADAR required. RADAR required for procedure entry.

▼


⚠

When local altimeter not received, use Rolla Ntl altimeter setting and increase all MDAs 80 feet. Increase S-33 Cats C/D visibility to 1¼ SM. Procedure NA when R-4501B or R-4501H in use. Circling NA west of Rwy 15-33. Rwy 33 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to Cats A and B. For inop ALS, increase Cats C and D visibility to 1¾ SM. Inop table does not apply to Cats A and B when using Rolla Ntl altimeter setting.

MALS

MISSED APPROACH: Climb to 3000 on TBN VOR R-323 to REBBS INT/I-TBN LOC/DME 11 DME and hold.

D-ATIS	KANSAS CITY CENTER	FORNEY TOWER ★	GND CON
118.7 229.4	128.35 284.675	125.4 (CTAF) 0 268.7	123.75 256.8

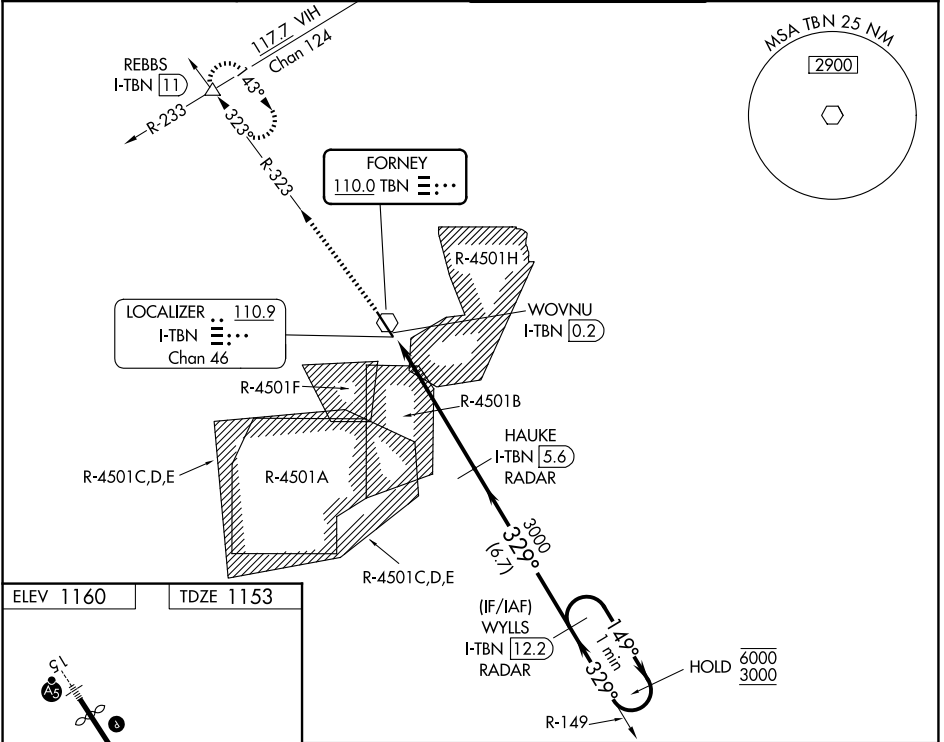

ELEV 1160

TDZE 1153

3000

REBBS

△

TBN R-323

I-TBN DME ANTENNA

WOVNU I-TBN 0.2

I-TBN 1.2

HAUKE I-TBN 5.6 RADAR

WYLLS I-TBN 12.2 RADAR

One Minute Holding Pattern

3000

329°

149°

6000

3000

3.00°

TCH 36

1.3 NM

4.4 NM

6.7 NM

CATEGORY	A	B	C	D
S-33	1600-1 447 (500-1)			
CIRCLING	1600-1 440 (500-1)	1660-1 500 (500-1)	1660-1½ 500 (500-½)	1720-2 560 (600-2)