WAAS	APP CRS	Rwy Ldg	5402
CH 62923	283°	TDZE	546
W28A		Apt Elev	546

RNAV (GPS) RWY 28

ASHLAND RGNL (DWU)

DME/DME RNP-0.3 NA. When local altimeter setting not received; use Huntington altimeter setting, increase all MDA 80 feet and all Circling visibilities ¼ mile. VDP NA when using Huntington altimeter setting.

MISSED APPROACH: Climb to 3300 direct NYOME and hold.

AWOS-3PT	HUNTINGTON APP CON	CLNC DEL	UNICOM
132.425	128.4 270.1	121.7	122.8 (CTAF) L

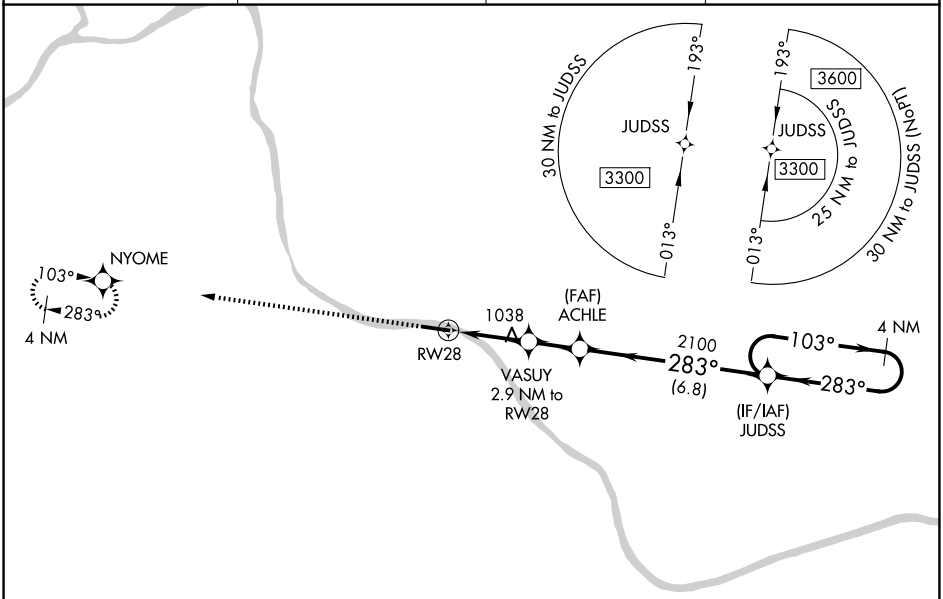

ELEV 546 TDZE 546



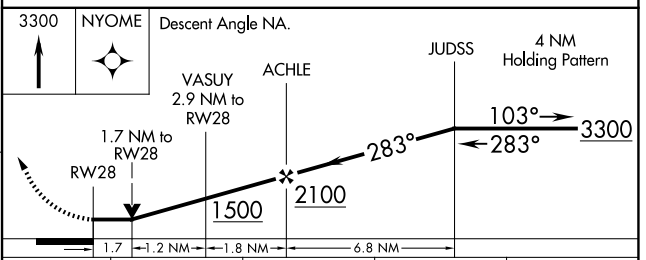

CATEGORY	A	B	C	D
LP MDA	1340-1 794 (800-1)	1340-1¼ 794 (800-1¼)	1340-2½ 794 (800-2½)	
LNAV MDA	1340-1 794 (800-1)	1340-1¼ 794 (800-1¼)	1340-2½ 794 (800-2½)	
CIRCLING	1340-1 794 (800-1)	1380-1¼ 834 (900-1¼)	1400-2½ 854 (900-2½)	1420-2¾ 874 (900-2¾)

MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

SE-1, 01 OCT 2026 to 29 OCT 2026
SE-1, 01 OCT 2026 to 29 OCT 2026