

WAAS
CH **61212**
W13A

APP CRS
129°

Rwy Ldg
TDZE
2020
Apt Elev
2032

RNAV (GPS) RWY 13

WINNER RGNL (ICR)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using VTN altimeter setting. When local altimeter setting not received, use VTN altimeter setting: increase LPV DA to 2451 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 2637 feet and all visibilities ¼ SM; increase all MDAs 200 feet and LNAV visibility Cat C ½ SM and Circling visibility Cats B/C ¾ SM.

MISSED APPROACH: Climb to 4100 direct AGUFY and hold.

ASOS 126.775	MINNEAPOLIS CENTER 125.1 269.1	GCO 121.725	UNICOM 122.8 (CTAF) 0
------------------------	--	-----------------------	---------------------------------

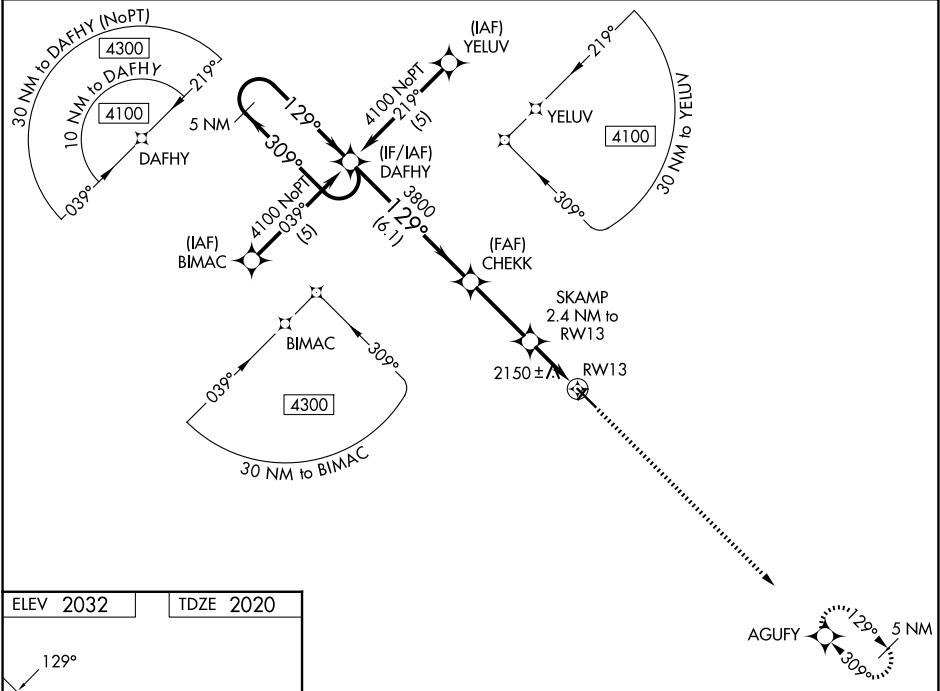

ELEV 2032

TDZE 2020

129°

500 X 75

2075

31

5 NM Holding Pattern

DAFHY

CHECK

SKAMP 2.4 NM to RWY 13

AGUFY

4100

3800

2800

GP 3.00°

TCH 38

6.1 NM

3 NM

1 NM

1.4 NM

RWY 13

CATEGORY	A	B	C	D
LPV DA	2270-1	250 (300-1)		NA
LNAV/VNAV DA	2456-1½	436 (500-1½)		NA
LNAV MDA	2480-1	460 (500-1)	2480-1¾ 460 (500-1¾)	NA
CIRCLING	2580-1 548 (600-1)	2680-1 648 (700-1)	2680-1¾ 648 (700-1¾)	NA