

LOC/DME I-GVT 110.5 Chan 42	APP CRS 176°	Rwy Ldg 8030 TDZE 534 Apt Elev 535
---	------------------------	---

ILS Y or LOC Y RWY 17
MAJORS (GVT)


DME required.

T Inop table does not apply to S-ILS 17 all Cats and S-LOC 17 Cats A/B.
A For inop ALS, increase S-LOC 17 Cat E visibility to 1½ SM.
 Autopilot coupled approach NA below 900 feet.

MALS

MISSED APPROACH: Climbing
right turn to 3000 on MJF
TACAN R-186 to CAJAN/MJF
TACAN 15 DME and hold.

AWOS-3 133.425	FORT WORTH CENTER 132.025 317.75	MAJORS TOWER★ 118.65 (CTAF) 0 385.425	GND CON 121.7 335.8	UNICOM 122.95
-------------------	-------------------------------------	--	------------------------	------------------

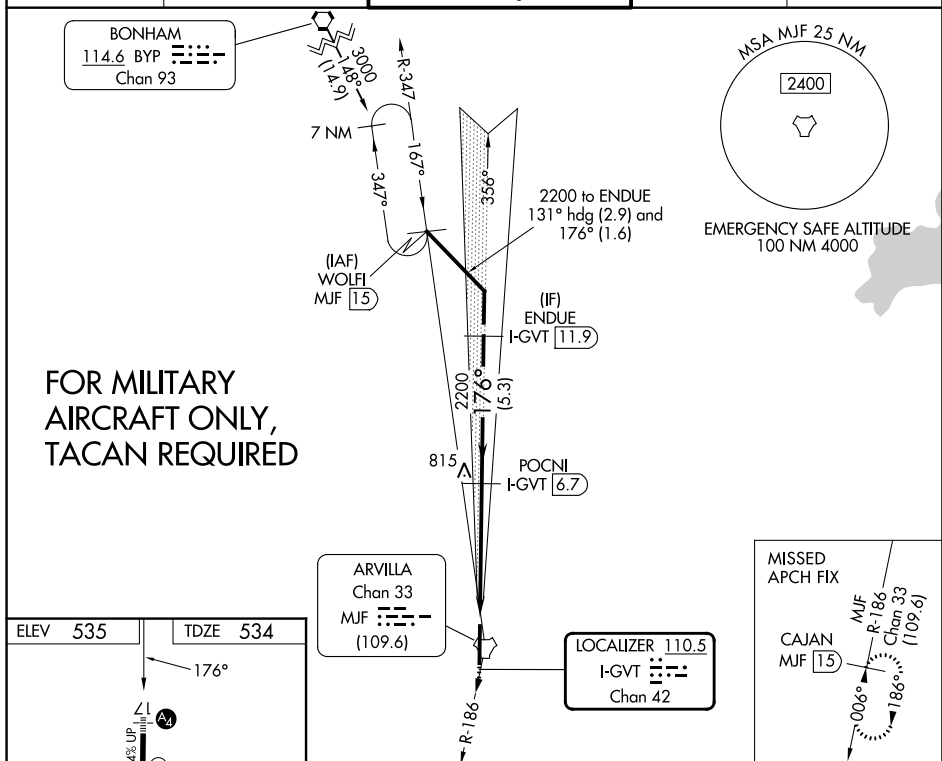

REIL Rwy 35
MIRL Rwy 17-35

0.3% UP
8030 X 150

3000
MUF R-186
CAJAN MUF 15

VGS and ILS glidepath not coincident
(VGS Angle 3.00/TCH 74).

POCNI
I-GVT 1.6
I-GVT 3
2200
176°
2200
ENDUE
I-GVT 11.9
GS 3.00°
TCH 57

Use I-GVT DME when on localizer course.

1.5 NM 3.6 NM 5.3 NM

CATEGORY	A	B	C	D	E
S-ILS 17	734-1 200 (200-1)				
S-LOC 17	1060-1 526 (600-1)		1060-1¼ 526 (600-1¼)		
CIRCLING	1060-1 525 (600-1)	1080-1 545 (600-1)	1080-1½ 545 (600-1½)	1240-2¼ 705 (800-2¼)	1300-2¾ 765 (800-2¾)