RNAV (GPS) RWY 2

W H 'BUD' BARRON (DBN)

WAAS	APP CRS	Rwy Ldg	6300
CH 78338	020°	TDZE	299
W02A		Apt Elev	311

Night landing: Rwy 32 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Vidalia altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Vidalia altimeter setting and increase LPV DA to 593 feet and LNAV/VNAV DA to 849 feet and all MDA 100 feet; increase LNAV/VNAV all Cats visibility ⅜ mile and LNAV Cats C/D visibility and Circling Cats C/D visibility ¼ mile. For inop MALSR, increase LNAV Cat C/D visibility to 1⅛ mile. For inop MALSR when using Vidalia altimeter setting, increase LPV all Cats visibility to 1 mile, LNAV/VNAV all Cats visibility to 1⅞ mile and LNAV Cat C/D visibility to 1⅜ mile.

MALSR

MISSED APPROACH: Climb to 2000 direct VOLVY and hold.

AWOS-3PT	ATLANTA APP CON ★	UNICOM
118.425	124.2 279.6	122.7 (CTAF) L

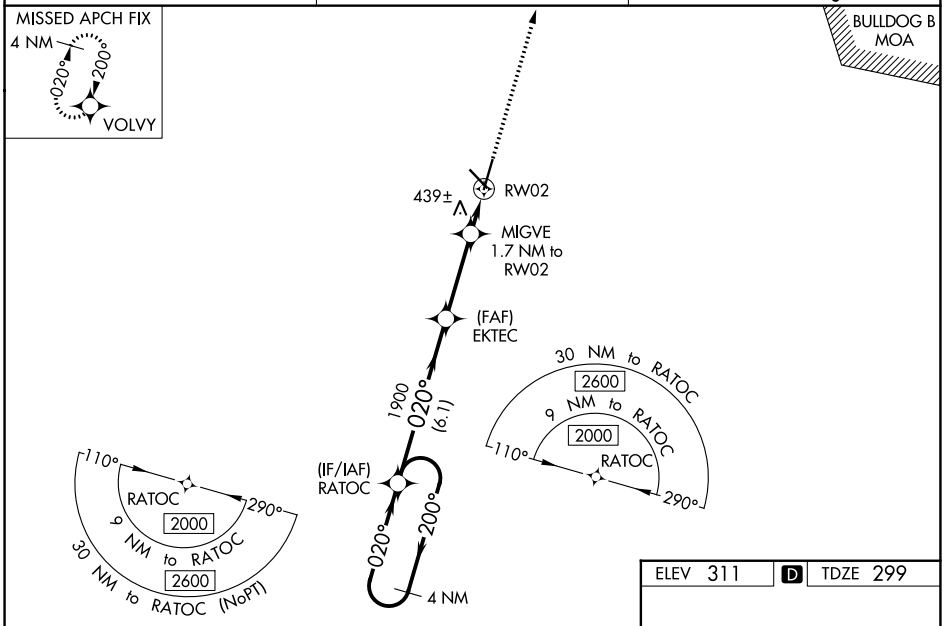

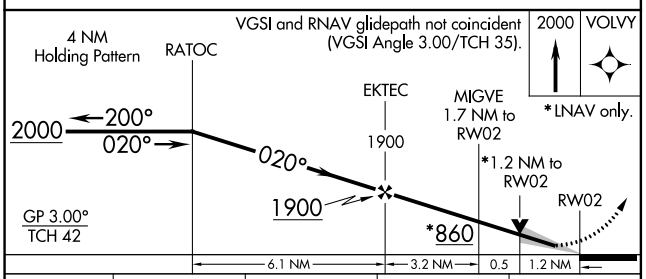

CATEGORY	A	B	C	D
LPV DA	499-½	200 (200-½)		
LNAV/VNAV DA	755-1⅛	456 (500-1⅛)		
LNAV MDA	700-½	401 (400-½)	700-¾	401 (400-¾)
CIRCLING	760-1 449 (500-1)	780-1 469 (500-1)	1020-2 709 (800-2)	1020-2¼ 709 (800-2¼)

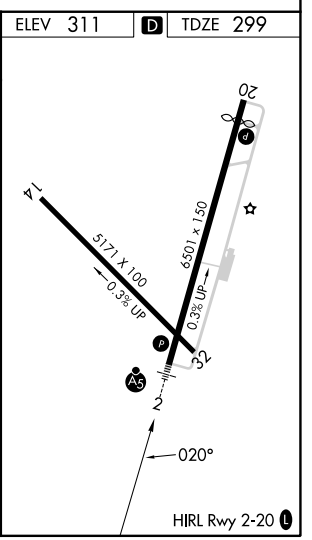

SE-4, 01 OCT 2026 to 29 OCT 2026
SE-4, 01 OCT 2026 to 29 OCT 2026