WAAS CH 61217 W19A	APP CRS 194°	Rwy Ldg 5701 TDZE 937 Apt Elev 956

RNAV (GPS) RWY 19

AMES MUNI (AMW)


RNP APCH - GPS.

Baro-VNAV and VDP NA when using Ankeny altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 19 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ankeny altimeter setting and increase LPV DA to 1239 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1434 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM.

-26°C


MISSED APPROACH: Climb to 4000 direct OHFAH and hold.

ASOS	DES MOINES APP CON	CLNC DEL	UNICOM
132.025	123.9 307.15	126.0	122.7 (CTAF) L

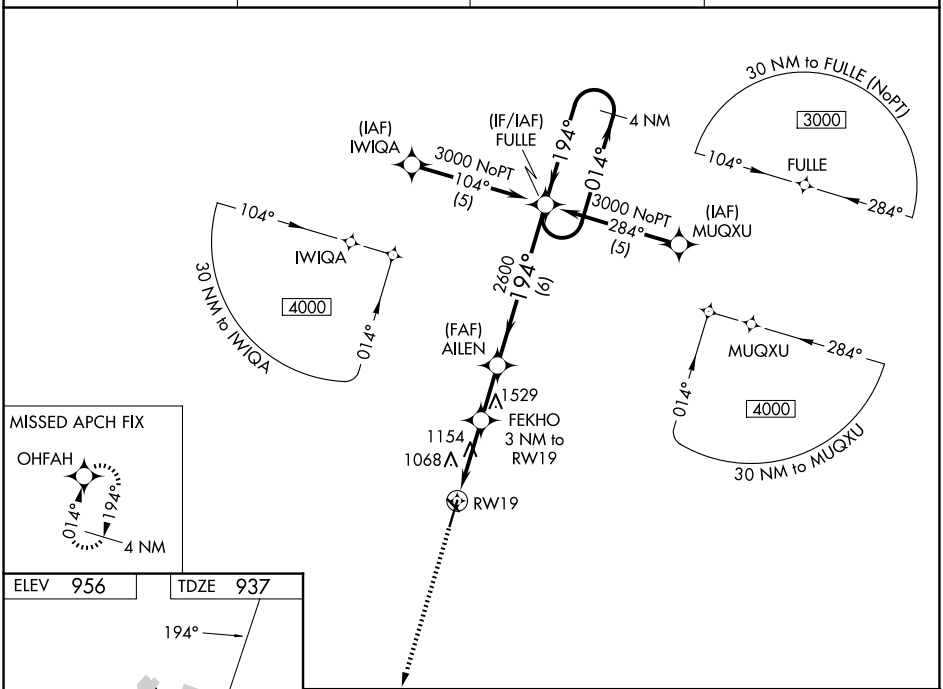

MISSED APCH FIX


ELEV 956 TDZE 937

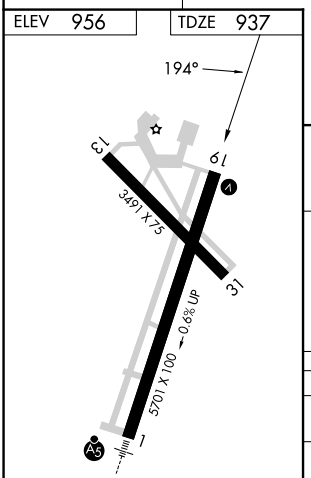

4000 OHFAH

VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 41).

*LNAV only.

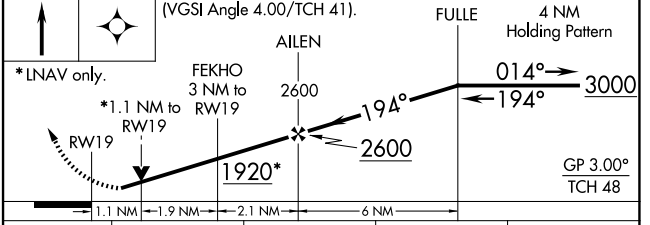

CATEGORY	A	B	C	D
LPV DA	1187-1 250 (300-1)			NA
LNAV/VNAV DA	1382-1⅜ 445 (500-1⅜)			NA
LNAV MDA	1420-1 483 (500-1)		1420-1⅜ 483 (500-1⅜)	NA

NC-3, 01 OCT 2026 to 29 OCT 2026
NC-3, 01 OCT 2026 to 29 OCT 2026