

WAAS CH 82438 W30A	APP CRS 305°	Rwy Ldg 4000 TDZE 1121 Apt Elev 1125
--	------------------------	---


RNAV (GPS) RWY 30
NORTHEAST IOWA RGNL (CCY)

RNP APCH - GPS.



T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. Rwy 30 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using ALO altimeter setting. Circling NA to Rwy 4 and 22. When local altimeter setting not received, use ALO altimeter setting and increase LPV DA to 1481 feet; increase LNAV/VNAV DA to 1481 feet; increase all MDAs 120 feet and LNAV visibility Cat C ¾ SM, and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 4000 direct JUKAG and hold, continue climb-in-hold to 4000.

AWOS-3 125.525	DES MOINES APP CON ★ 118.9 251.15	UNICOM 122.8 (CTAF) 0
--------------------------	---	--

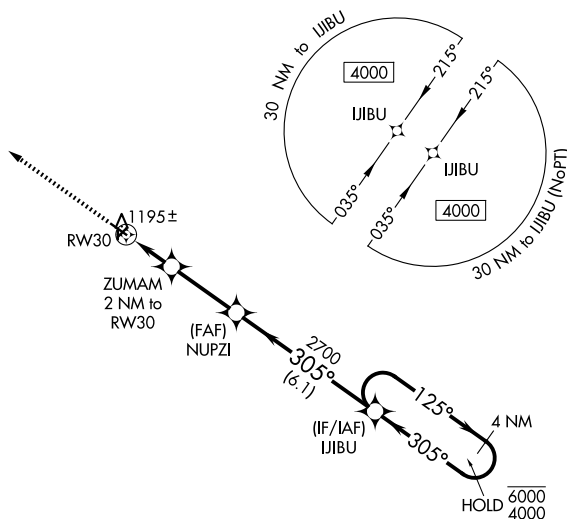

ELEV 1125		TDZE 1121
-----------	--	-----------

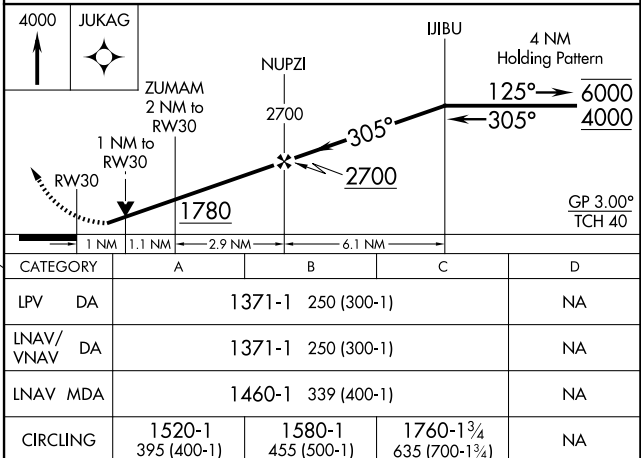

CHARLES CITY, IOWA
Amdt 2 02OCT25

43°04'N-92°37'W

NORTHEAST IOWA RGNL (CCY)
RNAV (GPS) RWY 30

NC-3, 01 OCT 2026 to 29 OCT 2026