# RNAV (GPS) RWY 35

FERGUS FALLS RGNL (FFM)

| APP CRS | Rwy Ldg | 3299 |
|---|---|---|
| 354° | TDZE | 1182 |
| | Apt Elev | 1183 |

RNP APCH-GPS.

When local altimeter setting not received, use Elbow Lake altimeter setting and increase all MDAs 60 feet, increase LNAV and Circling Cat C visibility ¼ SM. VDP NA when using Elbow Lake altimeter setting.

MISSED APPROACH: Climb to 3000 direct WABIV and via track 326° to PANIC and hold.

| AWOS-3PT | MINNEAPOLIS CENTER | UNICOM |
|---|---|---|
| 119.05 | 126.1 269.2 | 122.8 (CTAF) L |

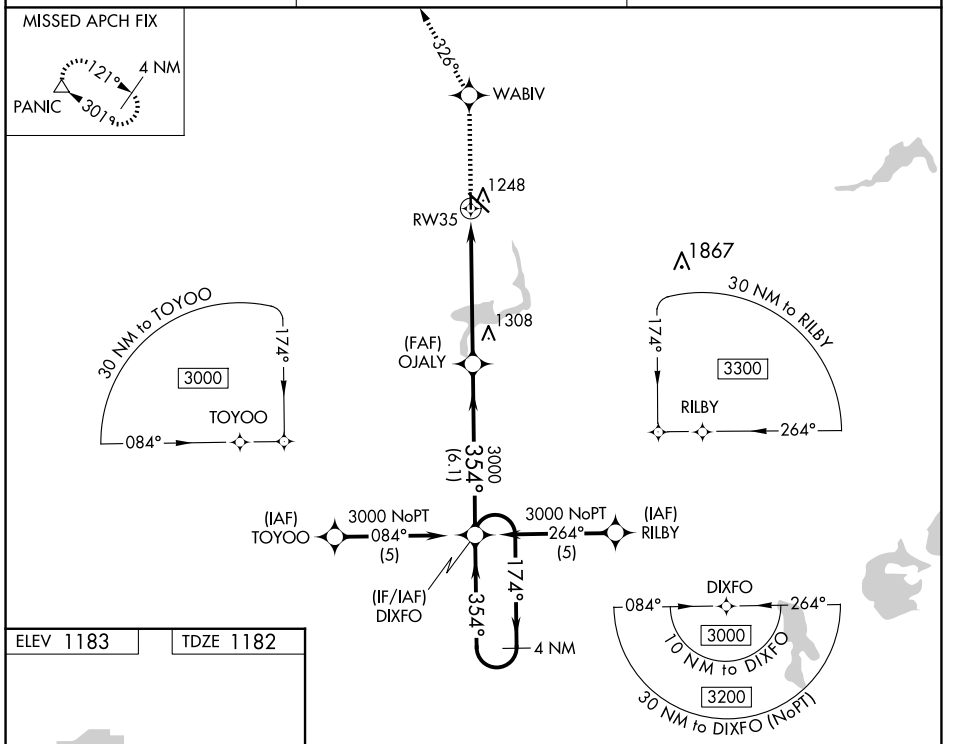


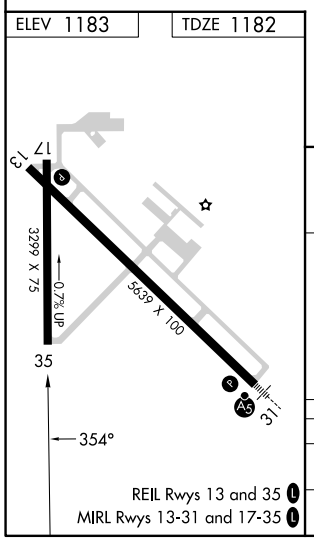


| 3000 | WABIV | tr 326° | PANIC |
|---|---|---|---|

4 NM Holding Pattern

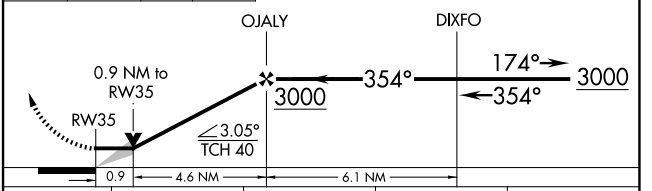


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LNAV MDA | 1560-1 378 (400-1) | | | NA |
| CIRCLING | 1640-1 457 (500-1) | 1740-1 557 (600-1) | 1820-1¾ 637 (700-1¾) | NA |

REIL Rwys 13 and 35 L
MIRL Rwys 13-31 and 17-35 L



NC-1, 01 OCT 2026 to 29 OCT 2026
NC-1, 01 OCT 2026 to 29 OCT 2026