RNAV (GPS) RWY 19

SHELBYVILLE MUNI (GEZ)

WAAS CH 53603 W19A	APP CRS 189°	Rwy Ldg 5000 TDZE 803 Apt Elev 803

RNP APCH.

Circling Rwy 9, 27 NA at night. Baro-VNAV NA when using Indianapolis Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP NA when using Indianapolis Intl altimeter setting. When local altimeter setting not received, use Indianapolis Intl altimeter setting: increase LPV DA to 1152 feet and LNAV/VNAV DA to 1199 feet; increase all MDA 60 feet and LNAV Cat C/D visibility ⅛ SM and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct WAGSE and hold.

ASOS	INDIANAPOLIS APP CON	UNICOM
121.55	127.15 317.8	122.8 (CTAF) L

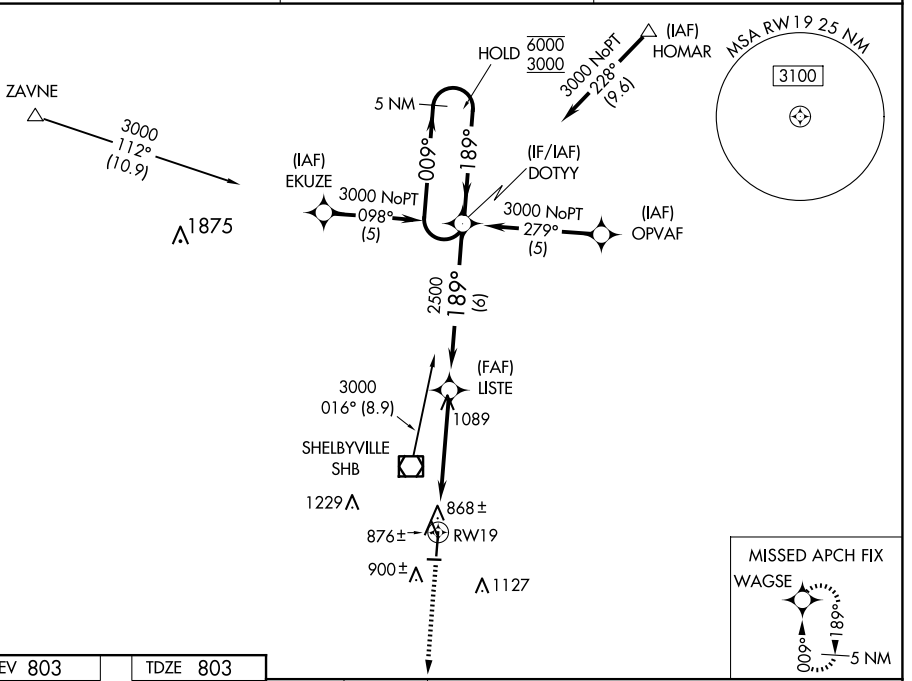

ELEV 803	TDZE 803

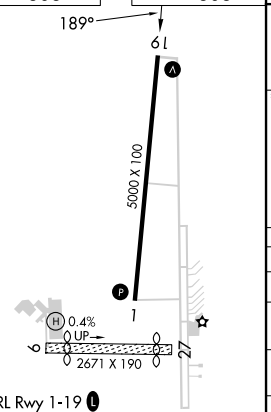

MIRL Rwy 1-19 L
REIL Rwys 1 and 19 L

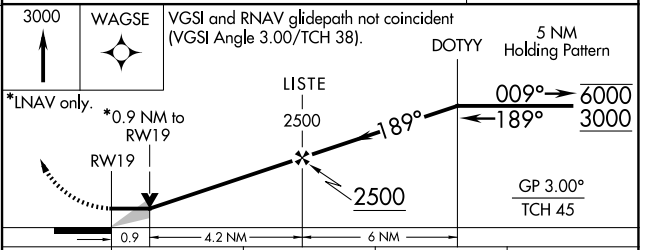

CATEGORY	A	B	C	D
LPV DA	1095-1 292 (300-1)			
LNAV/ VNAV DA	1142-1¼ 339 (400-1¼)			
LNAV MDA	1140-1 337 (400-1)			
CIRCLING	1240-1 437 (500-1)	1480-1 677 (700-1)	1480-2 677 (700-2)	1540-2¼ 737 (800-2¼)

EC-2, 01 OCT 2026 to 29 OCT 2026
EC-2, 01 OCT 2026 to 29 OCT 2026