WAAS CH 49130 W31A	APP CRS 315°	Rwy Ldg 5506 TDZE 1203 Apt Elev 1204

RNAV (GPS) RWY 31
ARTHUR N NEU (CIN)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Audubon altimeter setting. When local altimeter setting not received, use Audubon altimeter setting: increase LPV DA to 1515 feet; increase LNAV/VNAV DA to 1515 feet and increase all MDAs 80 feet and visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct AMABE and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.025	134.0 288.3	122.8 (CTAF) L

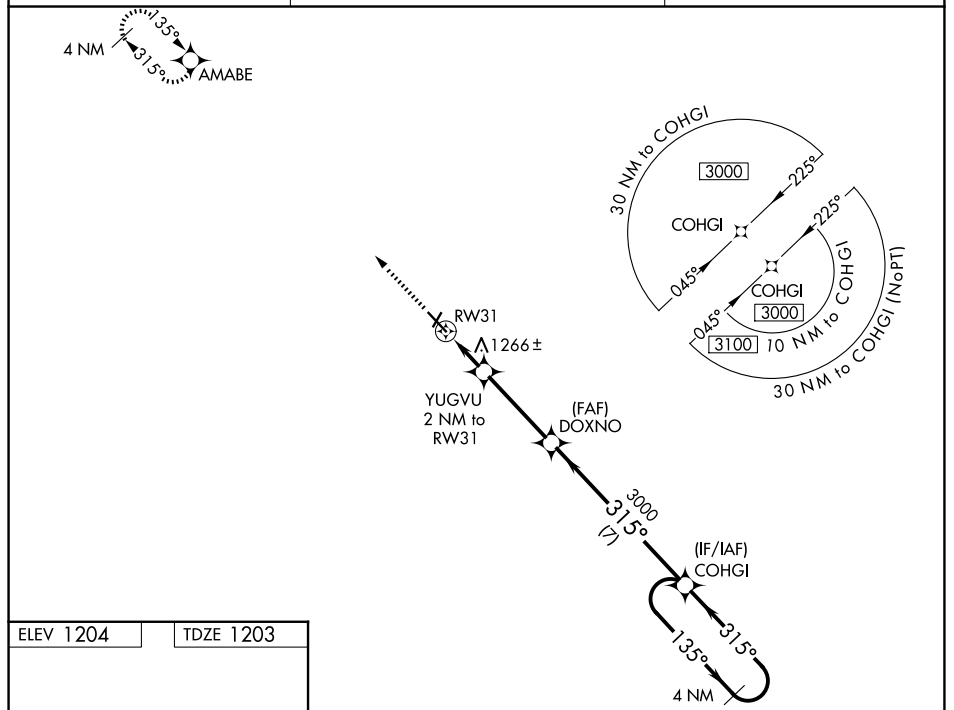

ELEV 1204 TDZE 1203



MIRL Rwys 13-31 and 3-21 L
REIL Rwys 3, 13, 21 and 31 L

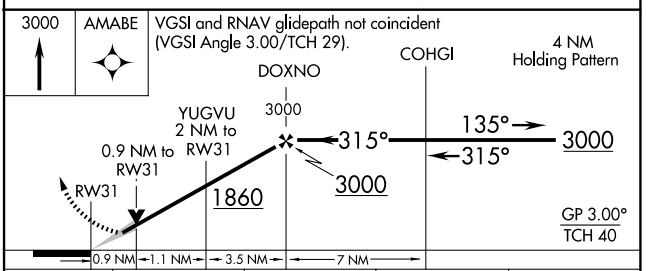

CATEGORY	A	B	C	D
LPV DA	1453-1 250 (300-1)			NA
LNAV/VNAV DA	1453-1 250 (300-1)			NA
LNAV MDA	1520-1 317 (400-1)			NA
CIRCLING	1740-1 536 (600-1)		1980-2¼ 776 (800-2¼)	NA

NC-3, 01 OCT 2026 to 29 OCT 2026
NC-3, 01 OCT 2026 to 29 OCT 2026