

RNP APCH-GPS.

▼


▲

Baro-VNAV and VDP NA when using Tracy Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C. When local altimeter setting not received, use Tracy Muni altimeter setting and increase LPV DA to 1441 feet; LNAV/VNAV DA to 1548 and all Cats visibilities ½ SM; increase all MDA 60 feet, LNAV visibility Cat C/D ½ SM and Circling visibility Cat C/D ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅔ SM, and LNAV Cat C/D visibility to 1 SM. For inop ALS when using Tracy Muni altimeter setting, increase LNAV/VNAV all Cats visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 3000 direct BOPMY and hold.

AWOS-3PT 120.150	MINNEAPOLIS CENTER 127.1 290.2	GCO 121.725	UNICOM 122.8 (CTAF)
----------------------------	--	-----------------------	-------------------------------

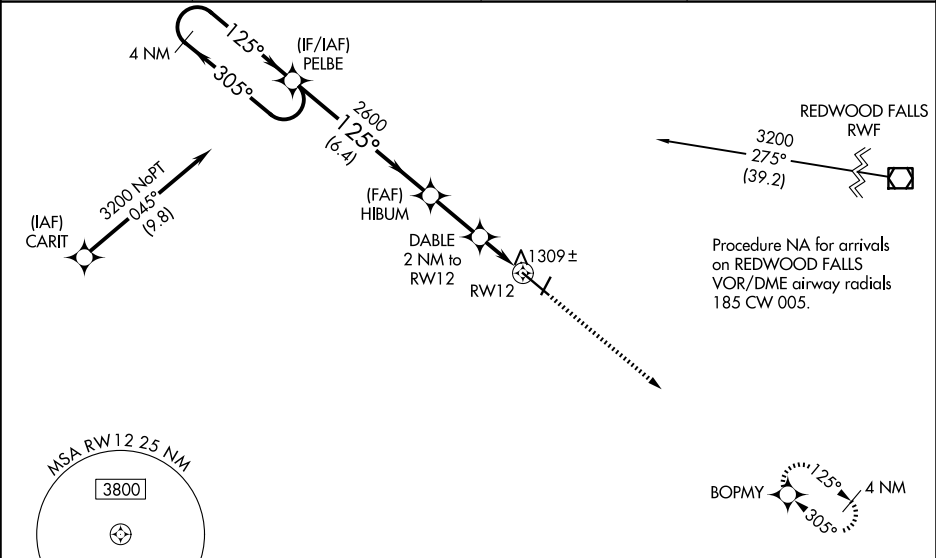

ELEV 1183		TDZE 1183	
3000 BOPMY			
4 NM Holding Pattern		*1860	
GP 3.00°		*1 NM to RW12	
TCH 49		RW12	
CATEGORY		A	
LPV DA		1383-½ 200 (200-½)	
LNAV/VNAV DA		1490-½ 307 (400-½)	
LNAV MDA		1560-½ 377 (400-½)	
CIRCLING		1640-1 457 (500-1)	
HIREL Rwy 12-30		REIL Rws 2 and 20	
MIRL Rwy 2-20		MIRL Rwy 2-20	