

|                                               |                        |                                                                 |
|-----------------------------------------------|------------------------|-----------------------------------------------------------------|
| VOR/DME ANW<br><b>112.7</b><br>Chan <b>74</b> | APP CRS<br><b>008°</b> | Rwy Ldg <b>6824</b><br>TDZE <b>2589</b><br>Apt Elev <b>2589</b> |
|-----------------------------------------------|------------------------|-----------------------------------------------------------------|



VOR RWY 35  
AINSWORTH RGNL (ANW)

**T** When local altimeter setting not received, procedure NA.  
**A** For inoperative ALS, increase BIYAG fix minimums  
 S-35 Cat D visibility to 1 1/4.



**MISSED APPROACH:** Climb to 3500 then climbing left turn to 6000 direct ANW VOR/DME and hold.

|                          |                                      |                                 |
|--------------------------|--------------------------------------|---------------------------------|
| AWOS-3<br><b>118.325</b> | DENVER CENTER<br><b>127.95 338.2</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|--------------------------------------|---------------------------------|

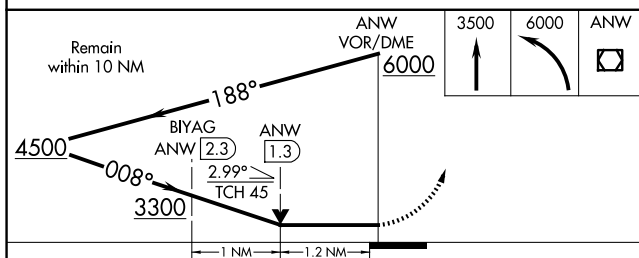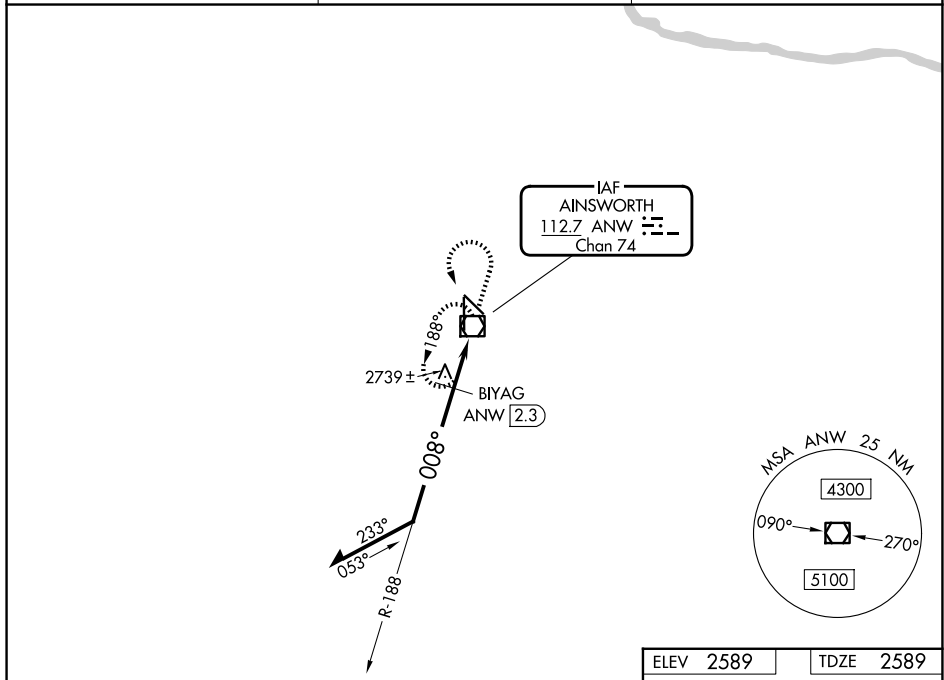

| CATEGORY                          | A                     | B                     | C                       | D                       |
|-----------------------------------|-----------------------|-----------------------|-------------------------|-------------------------|
| S-35                              | 3300-½                | 711 (800-½)           | 3300-1½<br>711 (800-1½) | 3300-1¾<br>711 (800-1¾) |
| CIRCLING                          | 3300-1                | 711 (800-1)           | 3300-2<br>711 (800-2)   | 3300-2¼<br>711 (800-2¼) |
| BIYAG FIX MINIMUMS (DME REQUIRED) |                       |                       |                         |                         |
| S-35                              | 3000-½                | 411 (500-½)           | 3000-¾<br>411 (500-¾)   | 3000-1<br>411 (500-1)   |
| CIRCLING                          | 3000-1<br>411 (500-1) | 3040-1<br>451 (500-1) | 3040-1½<br>451 (500-1½) | 3200-2<br>611 (700-2)   |

