

RNP APCH - GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. When local altimeter setting not received, use LBF altimeter setting: increase LPV DA to 2947 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 3337 feet and all visibilities ¾ SM; increase all MDAs 160 feet and LNAV visibility Cat B ¾ SM, and Circling visibility Cat B ¾ SM. Baro/VNAV and VDP NA when using LBF altimeter setting. Rwy 14 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 4300 direct LUXXE and hold.

ASOS 120.0	DENVER CENTER 132.7 226.675	UNICOM 122.8 (CTAF) 0
---------------	--------------------------------	--------------------------

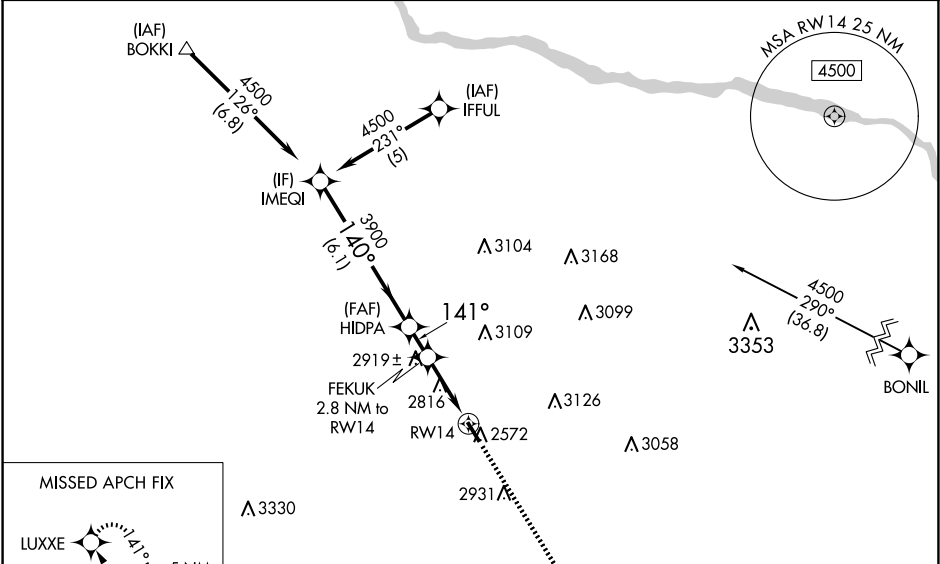

MISSED APCH FIX		ELEV 2546		TDZE 2546	
LUXXE (4300, 141°)		LUXXE (4300, 141°)		LUXXE (4300, 141°)	
IMEQI (3900, 140°)		HIDPA (3900, 141°)		FEKUK (2.8 NM to RW14)	
GP 3.00° TCH 40		3900		3480	
6.1 NM		1.3 NM		1 NM	
1.9 NM to RW14		1.9 NM to RW14		RW14	
CATEGORY	A	B	C	D	
LPV DA	2801-1	255 (300-1)	NA	NA	
LNAV/VNAV DA	3191-17/8	645 (700-17/8)	NA	NA	
LNAV MDA	3180-1	634 (700-1)	NA	NA	
CIRCLING	3180-1	634 (700-1)	NA	NA	
REIL Rwy 14 0		MIRL Rwy 14-32 0			