RNAV (GPS) RWY 15

PLATTEVILLE MUNI (PVB)

WAAS CH 42615 W15A	APP CRS 146°	Rwy Ldg 4000 / TDZE 1025 / Apt Elev 1025

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use DBQ altimeter setting and increase LPV DA to 1331 feet; increase LNAV/VNAV DA to 1394 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM. Baro-VNAV and VD NA when using Dubuque altimeter setting. Circling Rwy 7, 25 NA at night.

MISSED APPROACH: Climb to 3000 direct ZAWDI and hold.

AWOS-3	CHICAGO CENTER	UNICOM
120.575	133.95 281.4	122.7 (CTAF) L

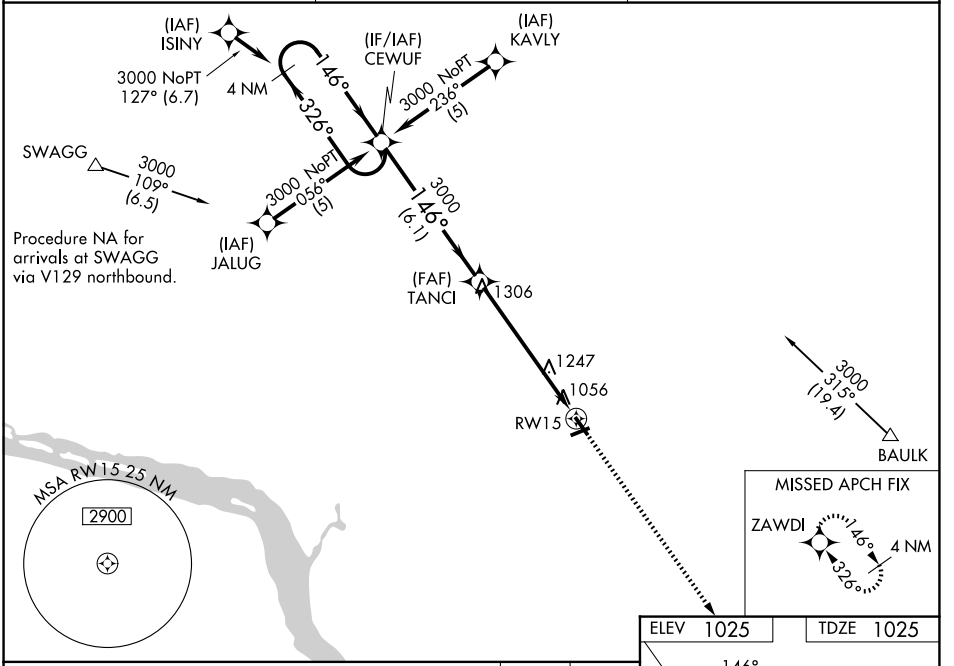

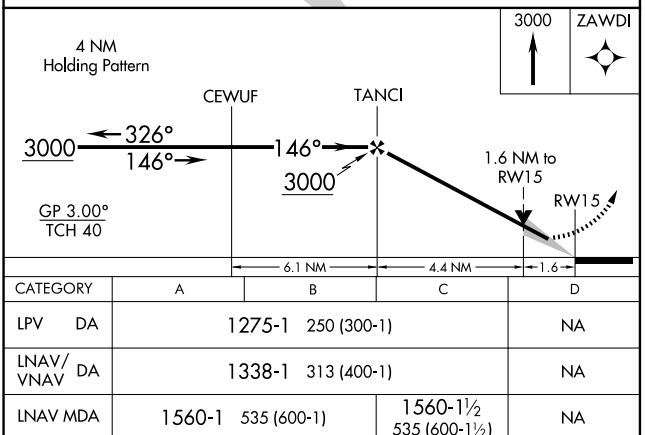

CATEGORY	A	B	C	D
LPV DA	1275-1 250 (300-1)			NA
LNAV/VNAV DA	1338-1 313 (400-1)			NA
LNAV MDA	1560-1 535 (600-1)		1560-1½ 535 (600-1½)	NA
CIRCLING	1560-1 535 (600-1)	1600-1 575 (600-1)	1600-1½ 575 (600-1½)	NA

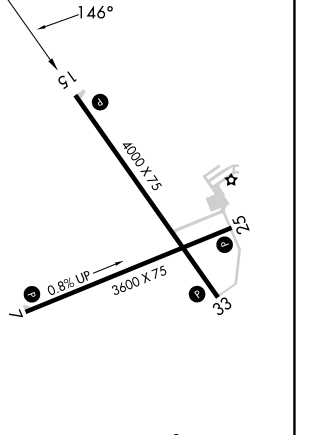

REIL Rwys 15 and 33 L
MIRL Rwys 7-25 and 15-33 L

EC-3, 01 OCT 2026 to 29 OCT 2026
EC-3, 01 OCT 2026 to 29 OCT 2026