

WAAS CH 70331 W35A	APP CRS 352°	Rwy Ldg TDZE 2426 Apt Elev 2430
--	------------------------	---

RNAV (GPS) RWY 35

WINSTON FLD (SNK)

RNP APCH - GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
Circling NA to Rwy's 8 and 26. Circling Rwy 17 NA at night. When local altimeter setting not received, use SWW altimeter setting and increase LPV DA to 2698 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 2748 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using SWW altimeter setting.

MISSED APPROACH: Climb to 5000 direct VARVY and on track 027° to WABVI and hold, continue climb-in-hold 6000.

AWOS-3 119.925	FORT WORTH CENTER 127.45 290.3	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

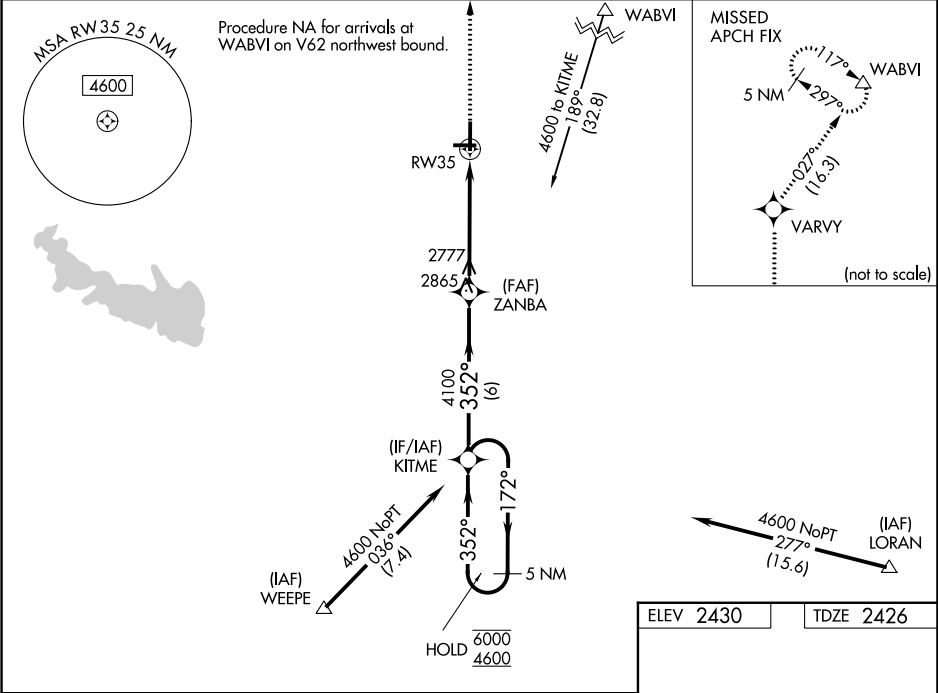

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).

5 NM Holding Pattern

6000
4600

GP 3.00°
TCH 45

172°
352°

4100

6 NM

3.2 NM

2 NM

2626-¾

200 (200-¾)

2676-¾

250 (300-¾)

3080-1

654 (700-1)

3220-2¼

790 (800-2¼)

CATEGORY	A	B	C	D
LPV DA		2626-¾	200 (200-¾)	NA
LNAV/VNAV DA		2676-¾	250 (300-¾)	NA
LNAV MDA		3080-1	654 (700-1)	NA
CIRCLING	3080-1	650 (700-1)		NA

