
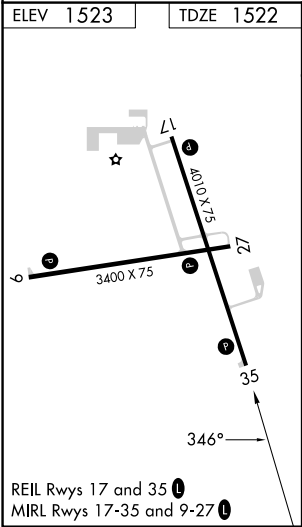


WAAS CH 45732 W35A	APP CRS 346°	Rwy Ldg TDZE 1522 Apt Elev 1523
--	------------------------	---

RNAV (GPS) RWY 35

LANGLADE COUNTY (AIG)

RNP APCH - GPS.			MISSED APPROACH: Climb to 3400 direct OZOOXY and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C . ▲ Baro-VNAV and VDP NA when using AUW altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use AUW altimeter setting and increase LPV DA to 1877 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 2124 feet and all visibilities ⅓ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ½ SM.			
AWOS-3 119.075	MINNEAPOLIS CENTER 124.4 317.7	UNICOM 122.8 (CTAF) 0	

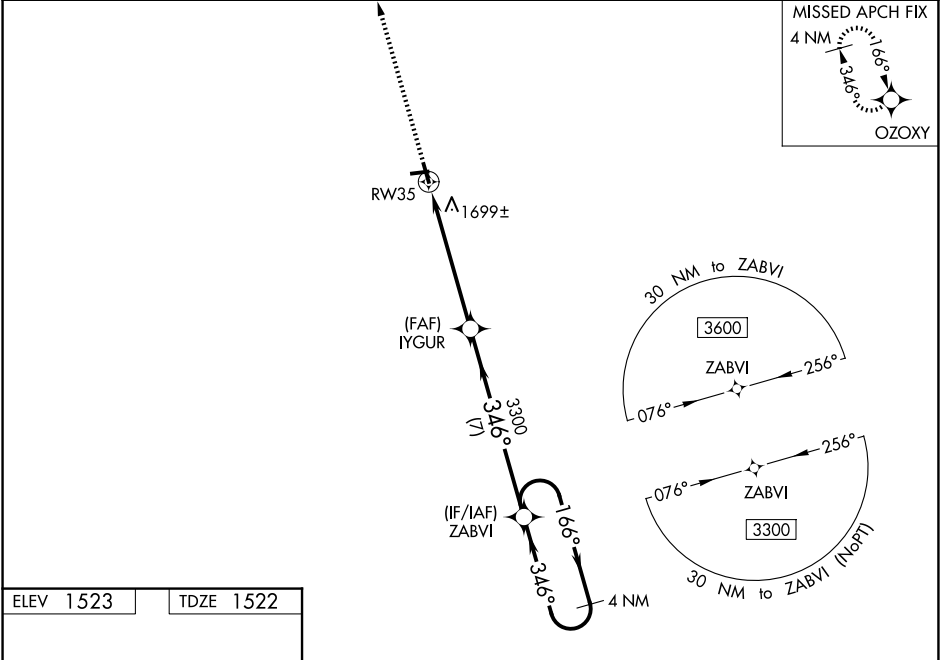

3400	OZOOXY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 36).		4 NM Holding Pattern
1.3 NM to RWY 35	1.3	4.2 NM	7 NM	
CATEGORY				
LPV DA				
LNAV/VNAV DA				
LNAV MDA				
CIRCLING				