RNAV (GPS) RWY 36

WEST WOODWARD (WWR)

WAAS	APP CRS	Rwy Ldg	6002
CH 40314	356°	TDZE	2189
W36A		Apt Elev	2189

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using GAG altimeter setting. When local altimeter setting not received, use GAG altimeter setting and increase LPV DA to 2435 feet and LNAV/VNAV DA to 2510 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 4000 direct DEANA and hold.

AWOS-3	KANSAS CITY CENTER	UNICOM
118.425	126.95 379.2	122.8 (CTAF) L

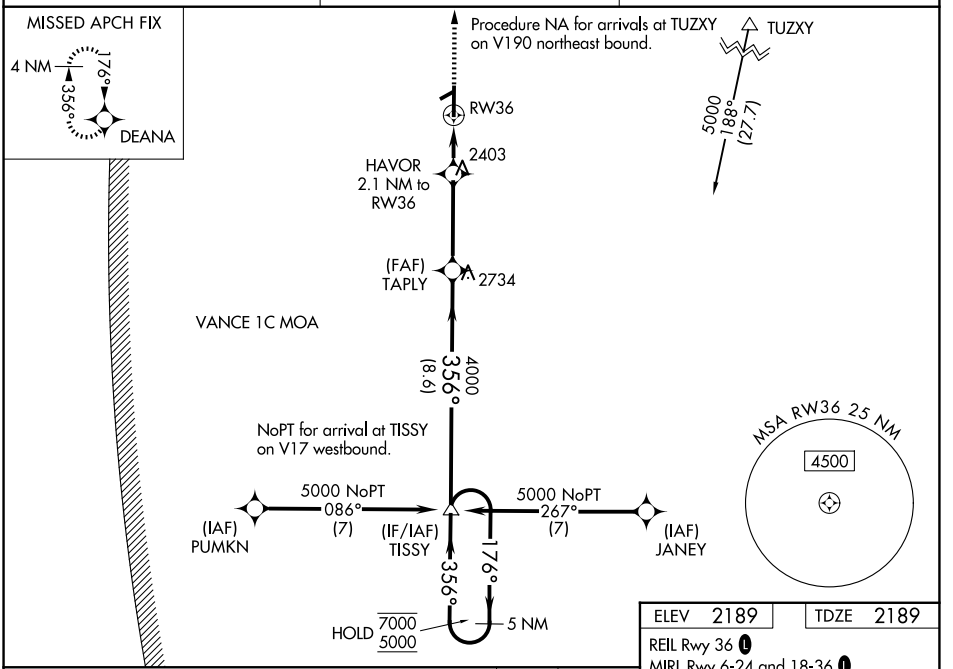

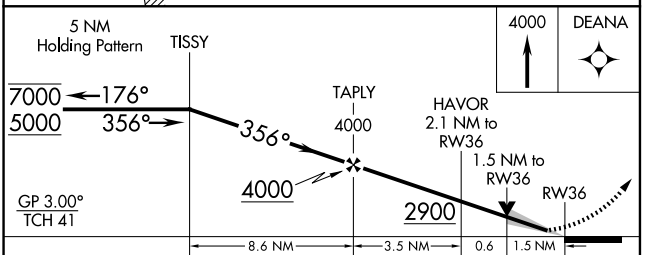

CATEGORY	A	B	C	D
LPV DA	2395-1		206 (300-1)	
LNAV/VNAV DA	2470-1		281 (300-1)	
LNAV MDA	2720-1	531 (600-1)	2720-1½	531 (600-1½)
CIRCLING	2720-1 531 (600-1)	2840-1 651 (700-1)	2940-2¼ 751 (800-2¼)	2960-2½ 771 (800-2½)

ELEV 2189 TDZE 2189

REIL Rwy 36 L

MIRL Rwy 6-24 and 18-36 L

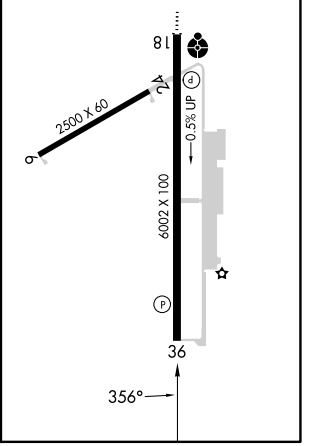

SC-1, 01 OCT 2026 to 29 OCT 2026
SC-1, 01 OCT 2026 to 29 OCT 2026