

WAAS CH 90538 W31A	APP CRS 316°	Rwy Ldg 3401 TDZE 754 Apt Elev 754
--	------------------------	---


RNAV (GPS) RWY 31
WASHINGTON MUNI (AWG)

RNP APCH.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F).
A Rwy 31 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Iowa City
 altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting; increase LPV
 and LNAV/VNAV DA to 1066 feet; increase all MDAs 80 feet and visibility LNAV Cat C ½ SM and
 Circling Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
GLOMS and hold.

AWOS-3 127.825	CHICAGO CENTER 135.6 370.95	UNICOM 122.7 (CTAF) Q
--------------------------	---------------------------------------	--

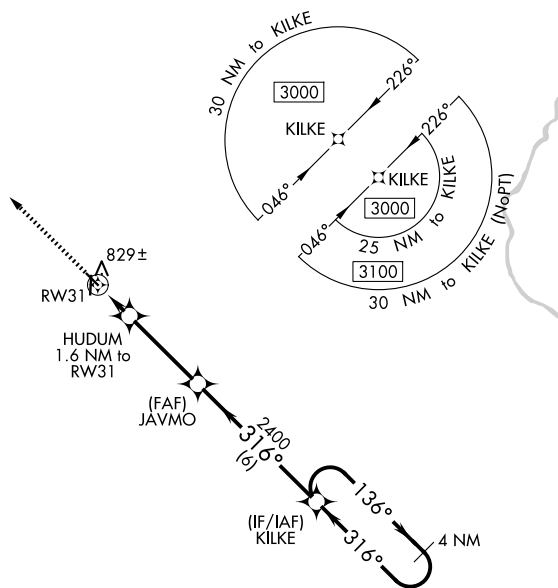

ELEV 754		TDZE 754
----------	--	----------



MIRL Rwy 13-31 and 18-36 **L**
REIL Rwy 13, 31, 18 and 36 **L**

WASHINGTON, IOWA
Orig-A 20JUN19

41°17'N-91°41'W

WASHINGTON MUNI (AWG)
RNAV (GPS) RWY 31

NC-3, 01 OCT 2026 to 29 OCT 2026