

WAAS CH 97328 W13A	APP CRS 131°	Rwy Ldg 7000 TDZE 208 Apt Elev 208
--	------------------------	---

RNAV (GPS) RWY 13

GRENADA MUNI (GNF)

RNP APCH.

T For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C. Baro-VNAV and VDP NA when using Greenwood altimeter setting. For Inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1½ SM. When local altimeter setting not received, use Greenwood altimeter setting: Increase all DAs 65 feet; increase all MDAs 80 feet and visibility LNAV Cats C and D and Circling all Cats ¼ SM. For Inop ALS when using Greenwood altimeter setting, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1½ SM. Circling RWY 4, 22 NA at night.


MALSF

MISSED APPROACH:
Climb to 3000 direct
ODPOF and hold.

AWOS-3PT
118.025

MEMPHIS CENTER
128.5 279.55

UNICOM
122.8 (CTAF)

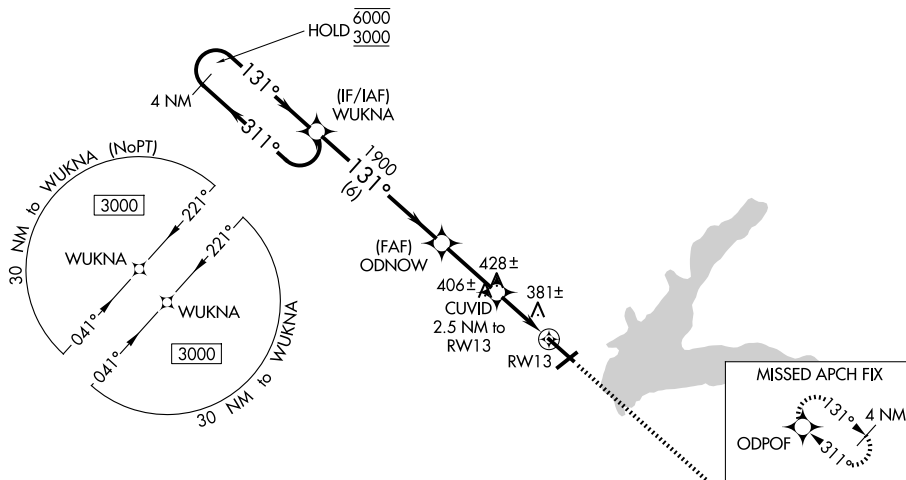

SC-4, 01 OCT 2026 to 29 OCT 2026

[illegible]

GRENADA, MISSISSIPPI
Amdt 1C 05NOV20

33°50'N-89°48'W

GRENADA MUNI (GNF)

RNAV (GPS) RWY 13