



WAAS CH 61140 W35A	APP CRS 354°	Rwy Ldg TDZE 1003 Apt Elev 1003
--	------------------------	---

RNAV (GPS) RWY 35
PERRY MUNI (F22)

NA

For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Ponca City altimeter setting. Rwy 35 helicopter visibility reduction below 3/4 SM NA. Obtain local altimeter setting on CTAF; when not received, use Ponca City altimeter setting and increase all DA 53 feet and all visibility 1/8 SM, increase all MDAs 60 feet and Cat C visibility 1/4 SM.

MISSED APPROACH:
Climb to 3000 direct AHOBY and hold.

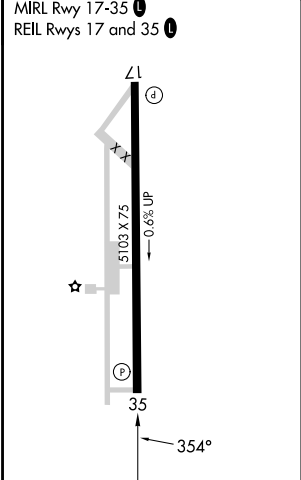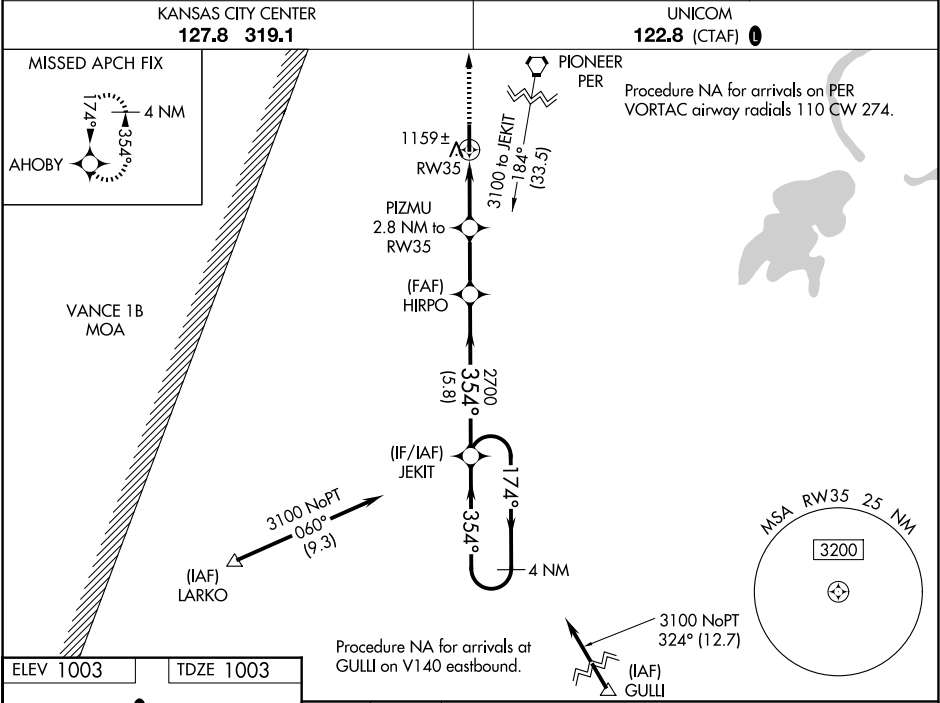

3000 AHOBY		4 NM Holding Pattern		
* LNAV only		PIZMU 2.8 NM to RW35		
1.2 1.6 2.4 NM 5.8 NM		GP 3.00° TCH 46		
CATEGORY	A	B	C	D
LPV DA	1253- ³ / ₄ 250 (300- ³ / ₄)			NA
LNAV/ VNAV	DA	1330-1 ¹ / ₈ 327 (400-1 ¹ / ₈)		NA
LNAV MDA	1420-1 417 (500-1)		1420-1 ¹ / ₈ 417 (500-1 ¹ / ₈)	NA
CIRCLING	1480-1 477 (500-1)		1620-1 ³ / ₄ 617 (700-1 ³ / ₄)	NA

SC-1, 01 OCT 2026 to 29 OCT 2026

SC-1, 01 OCT 2026 to 29 OCT 2026