

WAAS CH 93838 W27A	APP CRS 270°	Rwy Ldg TDZE Apt Elev	4043 1240 1243
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 27
CUMBERLAND MUNI (UBE)

RNP APCH - GPS

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Rice Lake altimeter setting. Rwy 27 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Rice Lake altimeter setting; increase LPV DA to 1533 feet and LNAV/VNAV DA to 1549 feet and all MDA 60 feet; increase LPV all Cots visibility and LNAV Cat C/D visibility 1/8 mile; increase Circling Cat D visibility 1/4 mile. Circling Rwy 18, 36 NA at night.

MISSED APPROACH:
Climb to 3400 direct
DESTE and hold.

AWOS-3PT 119.175	MINNEAPOLIS CENTER 125.3 335.6	GCO 121.725	UNICOM 122.8 (CTAF) ①
----------------------------	--	-----------------------	---------------------------------

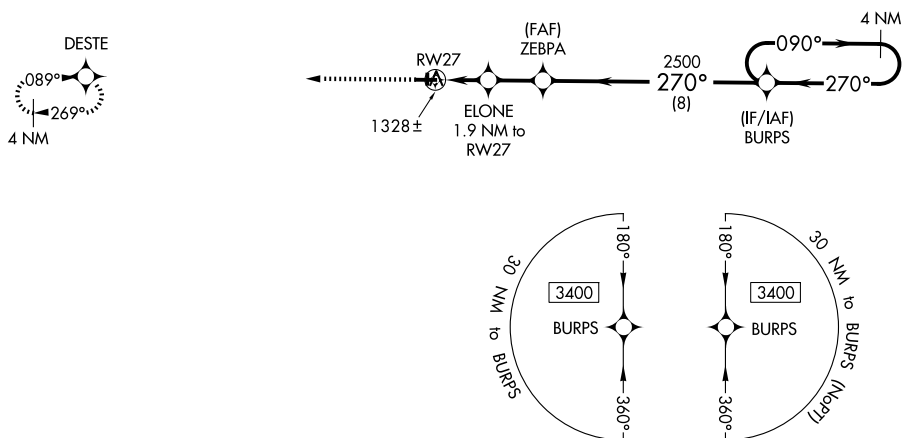

ELEV 1243		TDZE 1240
-----------	--	-----------

