WAAS	APP CRS	Rwy Ldg	4605
CH 49108	353°	TDZE	1823
W35A		Apt Elev	1827

RNAV (GPS) RWY 35

CURTIS FLD (BBD)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Baro-VNAV and VDP NA when using JCT altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use JCT altimeter setting and increase LPV DA to 2190 feet; increase LNAV/VNAV DA to 2287 feet and all visibilities ⅜ SM. Increase all MDAs 120 feet and LNAV visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 4000 direct OVACU and on track 263° to VIVCU and left turn on track 150° to BREDY and hold.

AWOS-3	HOUSTON CENTER	UNICOM
118.375	132.35 317.5	122.8 (CTAF) L

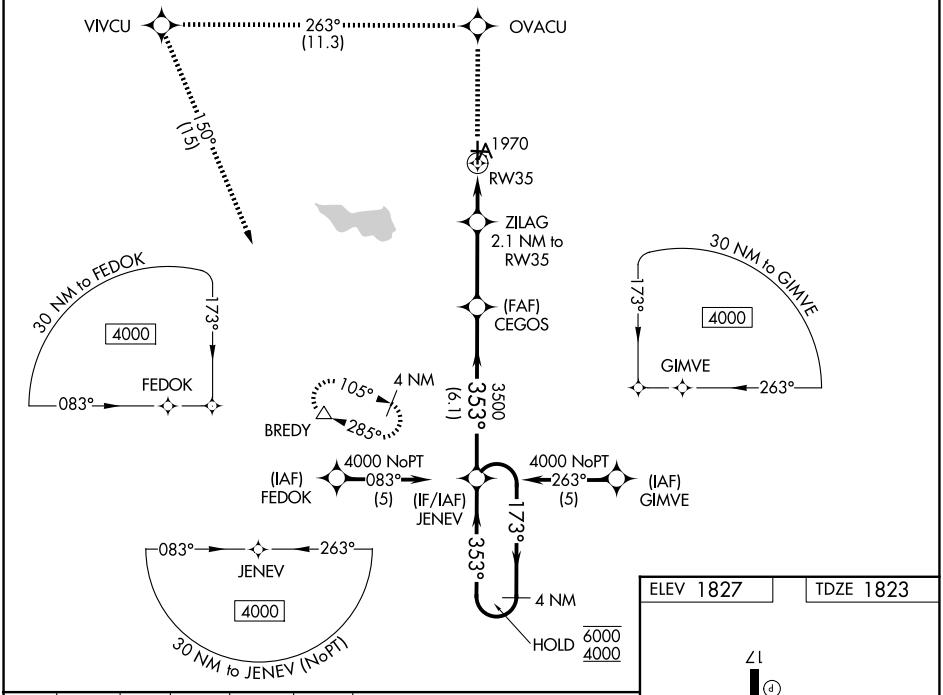

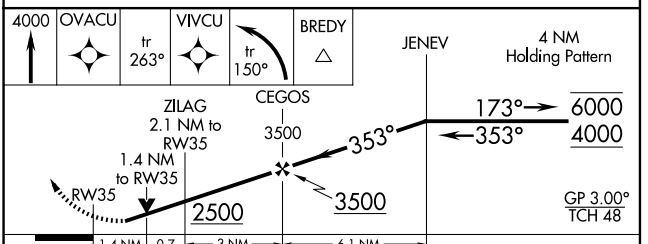

CATEGORY	A	B	C	D
LPV DA	2073-1 250 (300-1)			NA
LNAV/VNAV DA	2170-1 347 (400-1)			NA
LNAV MDA	2280-1 457 (500-1)		2280-1⅜ 457 (500-1⅜)	NA

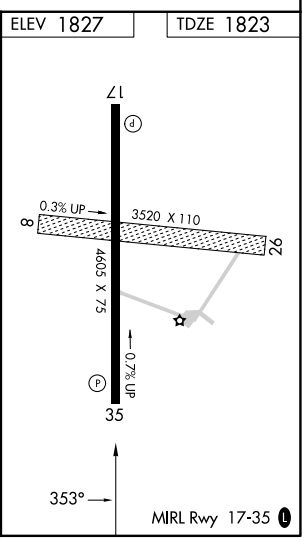

SC-3, 01 OCT 2026 to 29 OCT 2026
SC-3, 01 OCT 2026 to 29 OCT 2026