

LOC/DME I-JVX	APP CRS	Rwy Ldg	34R	34L
110.15		TDZE	681	687
Chan 38 (Y)	346°	Apt Elev	723	723

ILS or LOC RWY 34R

PEROT FLD/FORT WORTH ALLIANCE (AFW)

RADAR required for procedure entry.


▼ Circling NA east of Rwy 16L-34R. For inop ALS, increase S-ILS 34R Cat E visibility to RVR 4000 and S-LOC 34R Cat E visibility to 1½ SM.

▲


MALSRR

MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 on heading 270° and FUZ VORTAC R-303 to OBLON INT/FUZ 24 DME and hold.

ATIS 126.925	LONE STAR APP CON 118.1 306.95	ALLIANCE TOWER 135.15 257.9	GND CON 132.65 306.2
------------------------	--	---------------------------------------	--------------------------------

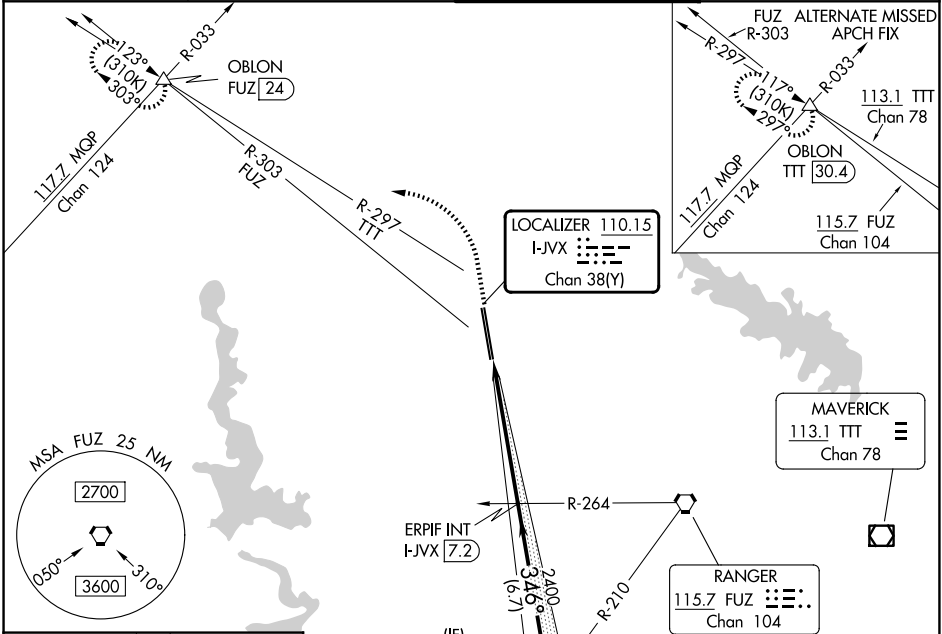

ELEV 723	D	TDZE 34R 681
		TDZE 34L 687

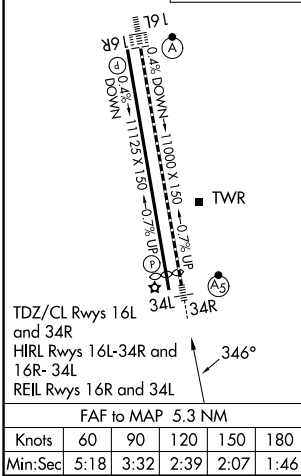

	1200	3000	OBLON	ERPIF INT I-JVX [7.2]	UCCOL INT I-JVX [13.9]
	↑	hdg 270°	FUZ R-303		
				2400	3000
				346°	GS 3.00° TCH 58
				1.6 NM	3.7 NM
				6.7 NM	
CATEGORY	A	B	C	D	E
S-ILS 34R	881/18		200 (200-½)		
S-LOC 34R	1240/24	559 (600-½)	1240/60	559 (600-1¼)	
SIDESTEP 34L	1240-1	553 (600-1)	1240-1½ 553 (600-1½)	1240-2	553 (600-2)
CIRCLING	1240-1 517 (600-1)	1320-1 597 (600-1)	1360-1¾ 637 (700-1¾)	1360-2 637 (700-2)	1380-2¼ 657 (700-2¼)