WAAS CH **77717** **W35A**	APP CRS **352°**	Rwy ldg **4000** TDZE **1035** Apt Elev **1040**

RNAV (GPS) RWY 35
CAMERON MEML (EZZ)

RNP APCH.

Rwy 35 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct EDUWU and hold.

AWOS-3	KANSAS CITY APP CON	CLNC DEL	UNICOM
121.05	**118.4 307.35**	**121.6**	**122.8** (CTAF) L

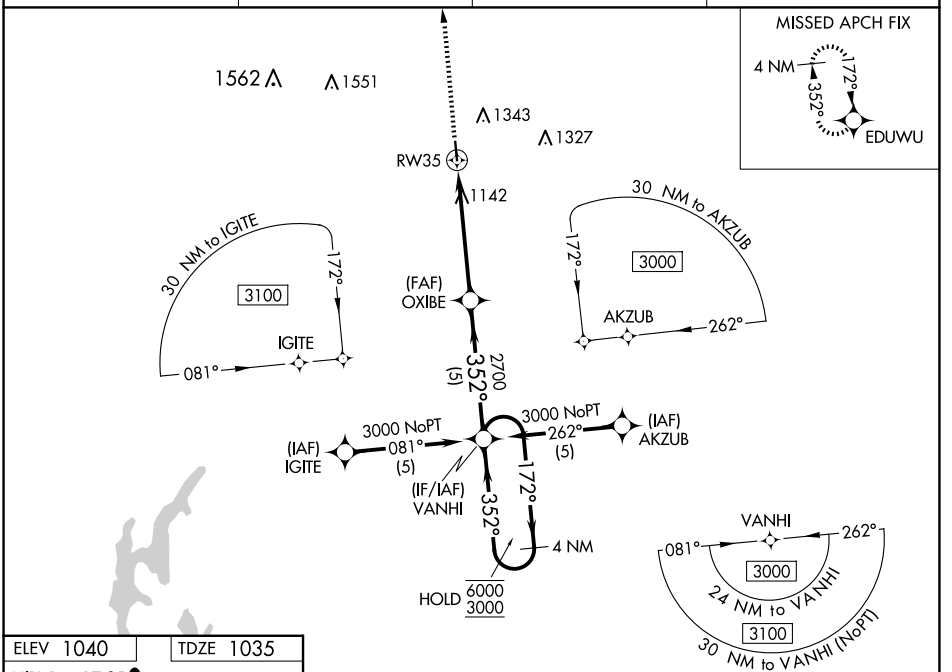

ELEV 1040 | TDZE 1035

MIRL Rwy 17-35 L

REIL Rwys 17 and 35 L

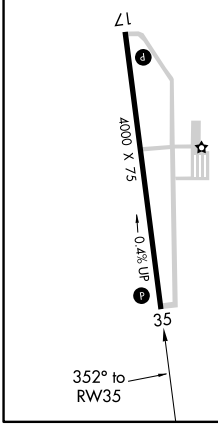

3000 | EDUWU

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22).

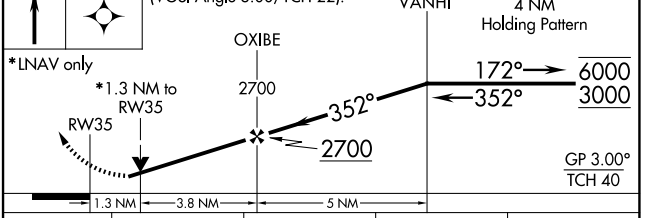

CATEGORY	A	B	C	D
LPV DA	1285-¾	250 (300-¾)	NA	
LNAV/VNAV DA	1310-⅞	275 (300-⅞)	NA	
LNAV MDA	1460-1	425 (500-1)	NA	
CIRCLING	1660-1	620 (700-1)	NA	

NC-3, 01 OCT 2026 to 29 OCT 2026
NC-3, 01 OCT 2026 to 29 OCT 2026