


WAAS CH 50138 W31A	APP CRS 309°	Rwy Ldg TDZE 2981 Apt Elev 2981
--	------------------------	---

RNAV (GPS) RWY 31

BAKER MUNI (BHK)

RNP APCH - GPS.	MISSED APPROACH: Climb to 6000 direct KIXCO and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C or above 54°C. Baro-VNAV and VDP NA when using BWV altimeter setting. When local altimeter setting not received, use BWV altimeter setting and increase LPV DA to 3332 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 3368 feet and all visibilities ¼ SM. Increase all MDAs 120 feet and LNAV visibility Cats C/D ¼ SM, and Circling visibility Cat C/D ½ SM.	

ASOS 135.475	SALT LAKE CENTER 126.85 305.2	CTAF 122.9 0
------------------------	---	------------------------

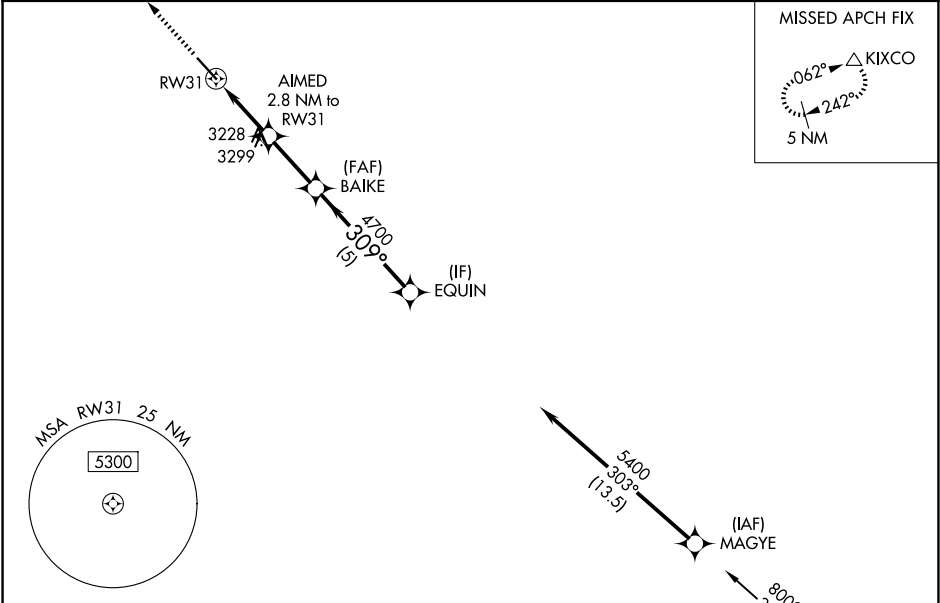

ELEV 2981	TDZE 2981
------------------	------------------

