RNAV (GPS) RWY 6

PAGELAND (PYG)


WAAS	APP CRS	Rwy Ldg	3396
CH 56440	058°	TDZE	574
W06A		Apt Elev	575


Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 943 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1139 feet and all visibilities ¼ SM. Increase all MDA 60 feet.

NA

MISSED APPROACH: Climb to 2400 direct WOVEX and hold.


EQY ASOS	CHARLOTTE APP CON	(CTAF)
135.775	120.05 307.8	122.9

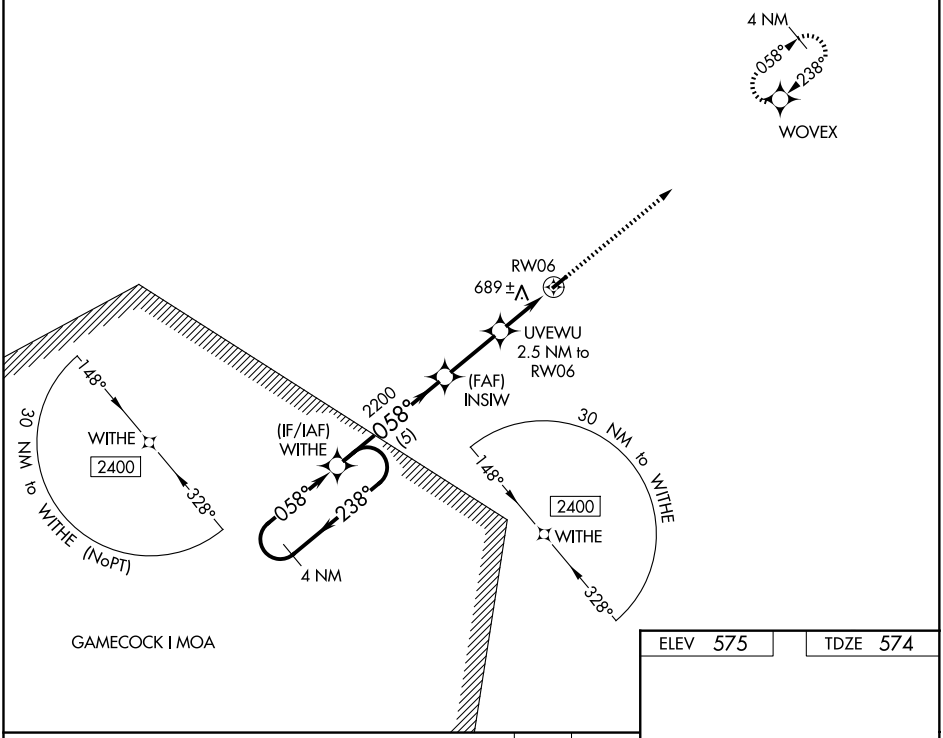

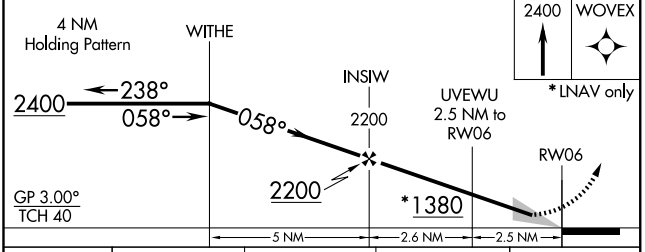

CATEGORY	A	B	C	D
LPV DA	889-1⅛	315 (400-1⅛)	NA	
LNAV/VNAV DA	1085-1⅞	511 (600-1⅞)	NA	
LNAV MDA	1020-1	446 (500-1)	NA	
CIRCLING	1100-1⅞	525 (600-1⅞)	NA	

ELEV 575 TDZE 574



MIRL Rwy 6
REIL Rwys 6 and 24

SE-2, 01 OCT 2026 to 29 OCT 2026
SE-2, 01 OCT 2026 to 29 OCT 2026