RNAV (GPS) RWY 36

LEESVILLE (L39)

WAAS	APP CRS	Rwy Ldg	3807
CH 40325	358°	TDZE	280
W36A		Apt Elev	282

When VGSI inop, Straight-in/Circling Rwy 36 procedure NA at night. DME/DME NA RNP-0.3 NA. Visibility reduction by helicopters NA. Use Fort Polk altimeter setting; when not received, use De Ridder altimeter setting and increase all MDA 40 feet, increase LP Cat C visibility ⅛ SM, and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 800 then climbing left turn to 4000 direct APPIN and hold.

KPOE ATIS	MAKS APP CON	UNICOM
134.85 282.2	123.7 261.3	122.8 (CTAF) L

RADAR REQUIRED

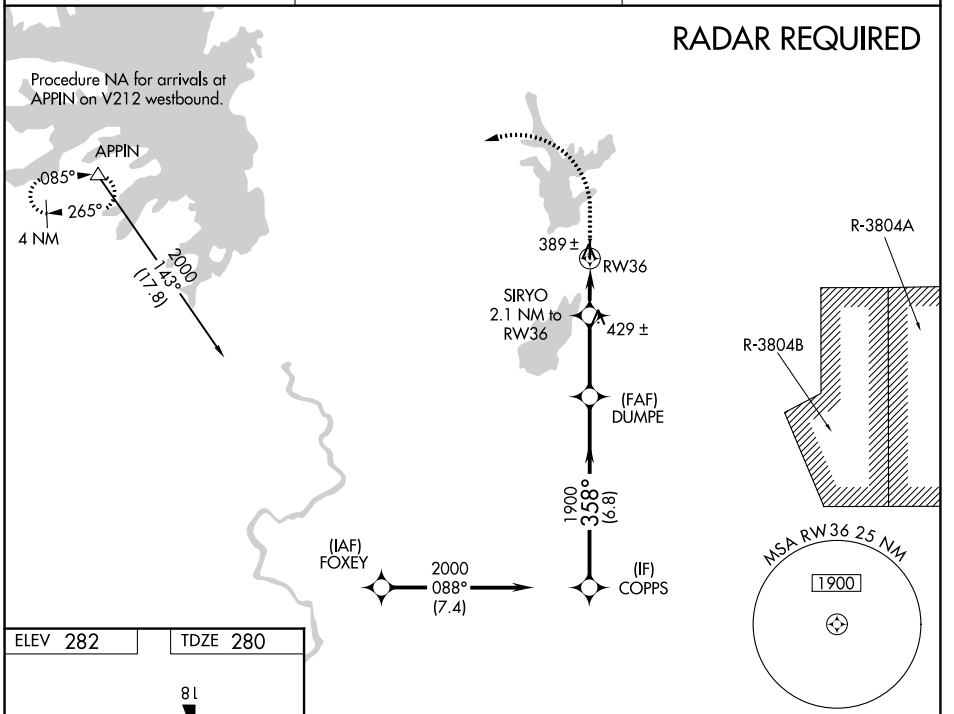

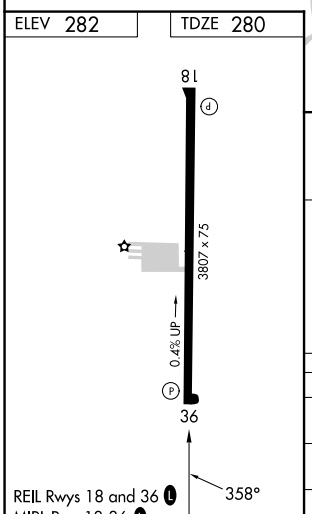

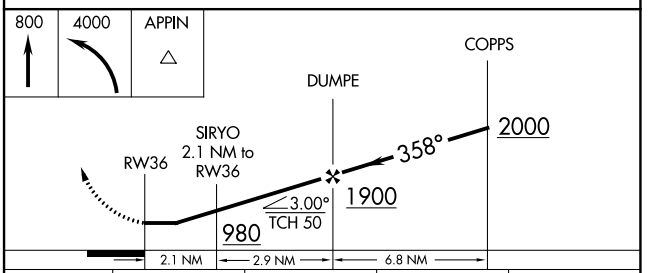

CATEGORY	A	B	C	D
LP MDA	680-1 400 (400-1)		680-1⅛ 400 (400-1⅛)	NA
LNAV MDA	720-1 440 (500-1)		720-1⅜ 440 (500-1⅜)	NA
CIRCLING	760-1 478 (500-1)	800-1 518 (600-1)	1000-2 718 (800-2)	NA

SC-4, 01 OCT 2026 to 29 OCT 2026
SC-4, 01 OCT 2026 to 29 OCT 2026