

(CONNR8.CONNR) 26078
CONNR EIGHT DEPARTURE (RNAV)

AL-9077 (FAA)


DENVER INTL (DEN)
DENVER, COLORADO

RNAV 1 - DME/DME/IRU or GPS.
TAKEOFF Rwy 8 RADAR required.
TAKEOFF Rwys 16L/R, 17L/R, 25, 34L/R, 35L/R
RADAR required for non-GPS equipped aircraft.


TOP ALTITUDE:
FL230

DENVER DEP CON
126.1 360.75
D-ATIS DEP
134.025
CLNC DEL
118.75
CPDIC

NOTE: Turbojets only.
NOTE: Accelerate to 250K upon reaching 10000. If slower speed is required to meet crossing restrictions, advise CLNC DEL prior to taxi.

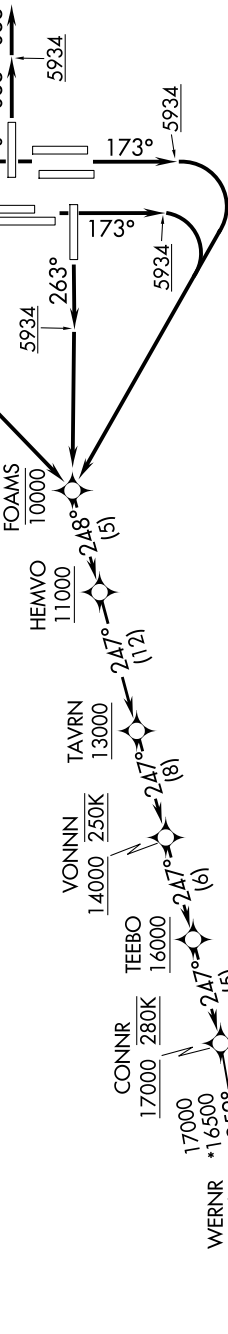

- TAKEOFF MINIMUMS**
Rwys 7, 26: NA - ATC.
Rwy 8: Standard.
Rwy 16L: Standard with minimum climb 425'/NM to 5934, then minimum climb of 210'/NM to 16000.
Rwy 16R: Standard with minimum climb 420'/NM to 5934, then minimum climb of 250'/NM to 16000.
Rwy 17L: Standard with minimum climb 450'/NM to 5934.
Rwy 17R: Standard with minimum climb 460'/NM to 5934, then minimum climb of 205'/NM to 16000.
Rwy 25: Standard with minimum climb 400'/NM to 5934, then minimum climb of 225'/NM to 16000.
Rwys 34L/R: Standard with minimum climb 400'/NM to 5934, then minimum climb of 210'/NM to 16000.
Rwys 35L/R: Standard with minimum climb 400'/NM to 5934.



NOTE: Chart not to scale.

CONNR EIGHT DEPARTURE (RNAV)
(CONNR8.CONNR) 19MAR26

DENVER, COLORADO
DENVER INTL (DEN)

(CONTINUED ON FOLLOWING PAGE)