


WAAS CH 58033 W16A	APP CRS 159°	Rwy Ldg TDZE Apt Elev	4007 1368 1368
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 16
WADENA MUNI (ADC)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3300 direct JOLIT and hold.
Baro-VNAV and VDP NA when using SAZ altimeter setting. Rwy 16 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwy 3 and 21. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use SAZ altimeter setting and increase LPV DA to 1682 feet; increase LNAV/VNAV DA to 1811 feet and all visibilities ¼ SM. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.	

AWOS-3PT 118.875	MINNEAPOLIS CENTER 126.1 269.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
----------------------------	--	-----------------------	---------------------------------

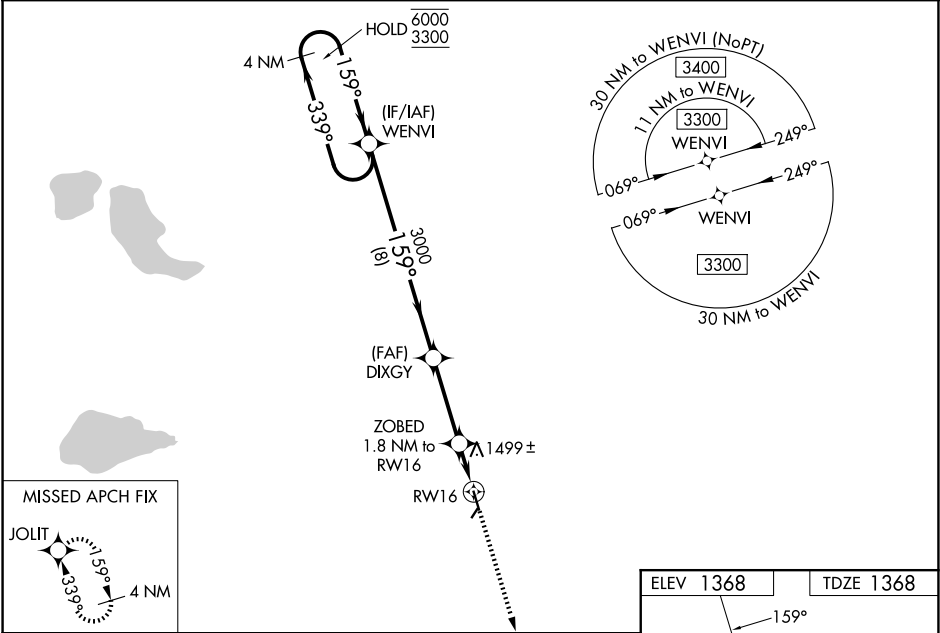

4 NM Holding Pattern		WENVI	DIXGY	ZOBED	JOLIT
6000	339°	3300	159°	159°	3300
GP 3.00°					
TCH 42					
	8 NM	3.2 NM	0.7	1.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1631-1	263 (300-1)		NA	
LNAV/VNAV DA	1760-1 ⅛	392 (400-1 ⅛)		NA	
LNAV MDA	1760-1	392 (400-1)	1760-1 ⅛	NA	
			392 (400-1 ⅛)		
CIRCLING	1780-1	1820-1	1940-1 ½	NA	
	412 (500-1)	452 (500-1)	572 (600-1 ½)		

