

WAAS CH 70633 W34A	APP CRS 339°	Rwy Ldg TDZE 1364 Apt Elev 1368
--	------------------------	---

RNAV (GPS) RWY 34

WADENA MUNI (ADC)

RNP APCH - GPS.


▼

⚠

Baro-VNAV and VDP NA when using SAZ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA to Rwy's 3 and 21. When local altimeter setting not received, use SAZ altimeter setting and increase LPV DA to 1665 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1842 feet and all visibilities ¼ SM. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3300 direct WENVI and hold.

AWOS-3PT 118.875	MINNEAPOLIS CENTER 126.1 269.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
----------------------------	--	-----------------------	---------------------------------

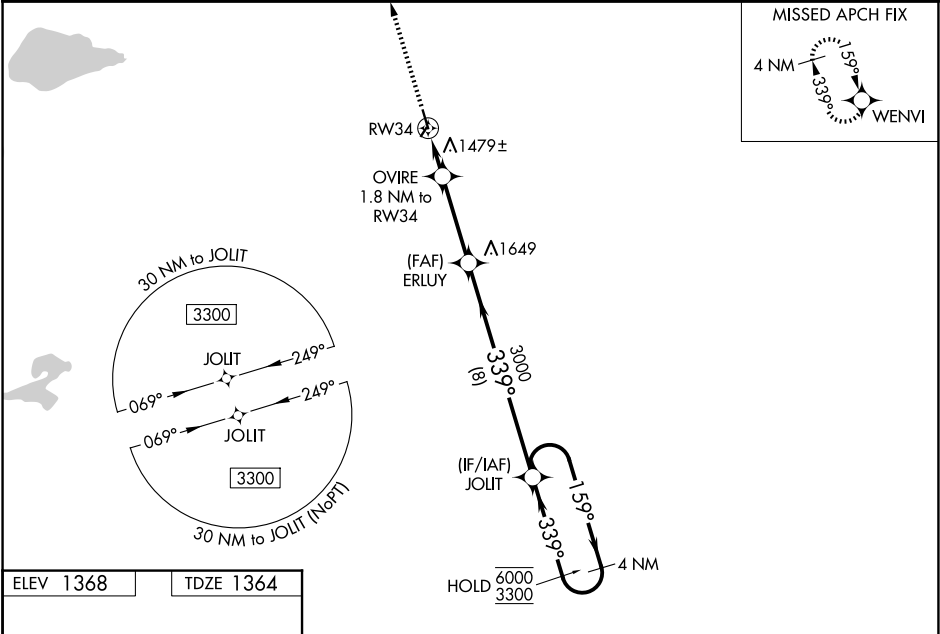

ELEV 1368

TDZE 1364

91

4007 X 75

0.3 NM to RWY 34

2100 X 75

0.3 NM to RWY 34

MIRL Rwy 16-34

REIL Rwy 16 and 34

3300

WENVI

OVIRE 1.8 NM to RWY 34

ERLUY

JOLIT

4 NM Holding Pattern

1590

3390

3000

1960

1.1 NM

0.7 NM

3.2 NM

8 NM

GP 3.00°

TCH 42

CATEGORY	A	B	C	D
LPV	DA	1614-1	250 (300-1)	NA
LNAV/VNAV	DA	1791-1½	427 (500-1½)	NA
LNAV	MDA	1740-1	376 (400-1)	1740-1½ 376 (400-1½)
CIRCLING	1780-1 412 (500-1)	1820-1 452 (500-1)	1940-1½ 572 (600-1½)	NA

NC-1, 01 OCT 2026 to 29 OCT 2026

NC-1, 01 OCT 2026 to 29 OCT 2026