

WAAS CH 42628 W07A	APP CRS 074°	Rwy Idg TDZE Apt Elev	5000 1112 1122
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7

BELLEFONTAINE RGNL (ED.J)


▼

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 37°C (98°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with James M. Cox Dayton Intl altimeter setting. When local altimeter setting not received, use James M. Cox Dayton Intl altimeter setting: increase LPV DA to 1456 feet, LNAV/VNAV DA to 1598 feet, and all MDAs 100 feet, and increase LPV and LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C and D visibility ⅓ SM, and Circling Cat C visibility ½ SM and Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 1600 then climbing left turn to 3000 direct BUTYN and hold.

AWOS-3 118.075	COLUMBUS APP CON 134.45 294.5	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

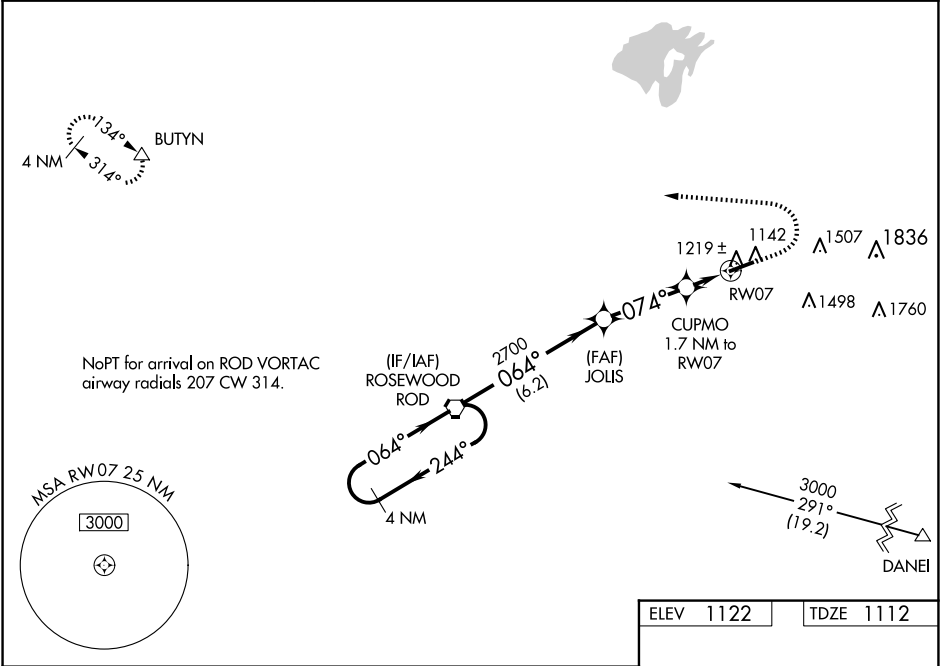

4 NM Holding Pattern

ROD VORTAC

JOLIS

CUPMO

BUTYN

GP 3.00° TCH 41

1600

3000

△

* LNAV only.

2700

1.7 NM to RW07

* 1.1 NM to RW07

RW07

6.2 NM

3.2 NM

0.7 NM

1.1 NM

* 1680

CATEGORY	A	B	C	D
LPV DA		1362-7⁄8	250 (300-7⁄8)	
LNAV/VNAV DA		1504-13⁄8	392 (400-13⁄8)	
LNAV MDA		1480-1	368 (400-1)	
CIRCLING	1620-1 498 (500-1)	1640-1 518 (600-1)	1860-2 738 (800-2)	1980-2 3⁄4 858 (900-2 3⁄4)

ELEV 1122

TDZE 1112

5000 X 100

0.4% UP

1178

074°

MIRL Rwy 7-25 0
REIL Rwy 7 and 25 0