RNAV (GPS) RWY 34

WILDER (6E5)

WAAS	APP CRS	Rwy Idg	3700
CH 40048	337°	TDZE	1730
W34A		Apt Elev	1730

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Rwy 34 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using MDS altimeter setting. When local altimeter setting not received, use MDS altimeter setting and increase LPV DA to 2056 feet; increase LNAV/VNAV DA to 2180 feet and all visibilities ⅜ SM. Increase all MDAs 80 feet.

MISSED APPROACH: Climb to 3600 direct EFIHO and hold.

AWOS-3P	MINNEAPOLIS CENTER	CTAF
118.15	126.25 339.8	122.9 L

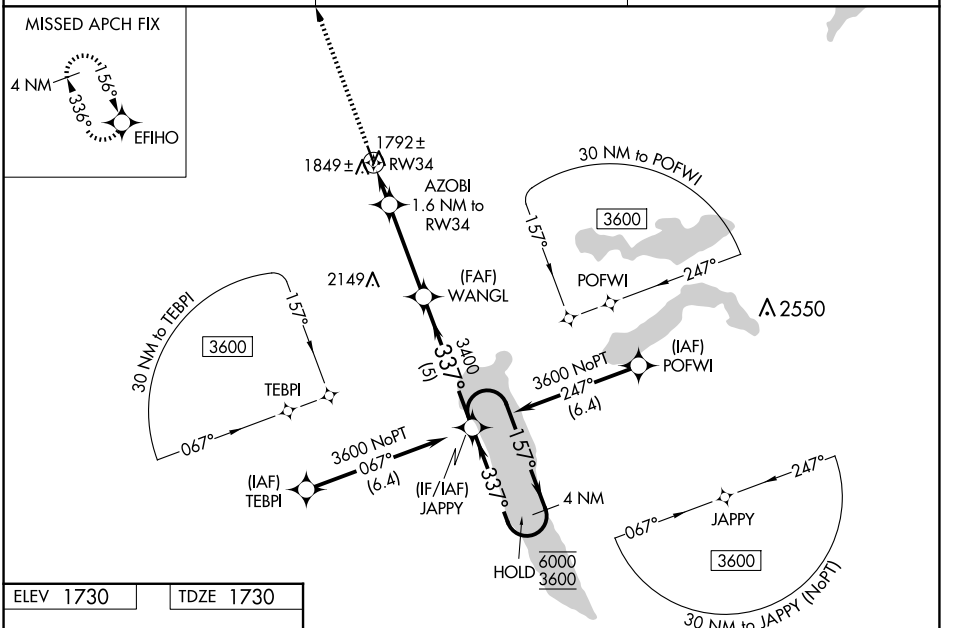

ELEV 1730 TDZE 1730

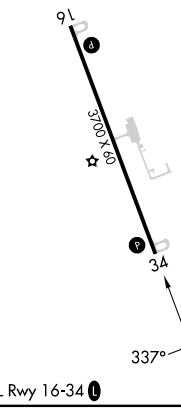

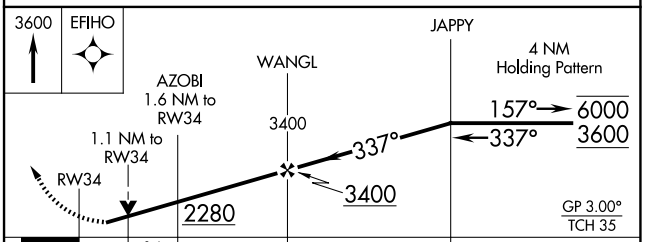

CATEGORY	A	B	C	D
LPV DA	1980-1 250 (300-1)		NA	
LNAV/VNAV DA	2100-1 370 (400-1)		NA	
LNAV MDA	2100-1 370 (400-1)		NA	
CIRCLING	2180-1 450 (500-1)	2220-1 490 (500-1)	NA	

NC-1, 01 OCT 2026 to 29 OCT 2026
NC-1, 01 OCT 2026 to 29 OCT 2026