

WAAS
CH **77842**
W28A

APP CRS
281°

Rwy Ldg
TDZE **732**
Apt Elev **732**

RNAV (GPS) RWY 28

BRECKINRIDGE COUNTY (I93)

RNP APCH.


▼

NA

Baro-VNAV NA. Use Fort Knox altimeter setting, when not received, use Elizabethtown altimeter setting and increase LPV DA to 1047, LNAV/VNAV DA to 1185 and all MDA 20 feet.

MISSED APPROACH: Climb to 4000 direct RICKZ and hold, continue climb-in-hold to 4000.

AWOS-3PT 123.625	KFTK ATIS ★ 109.6	LOUISVILLE APP CON 123.675 327.0	CTAF 122.9 0
----------------------------	-----------------------------	--	------------------------

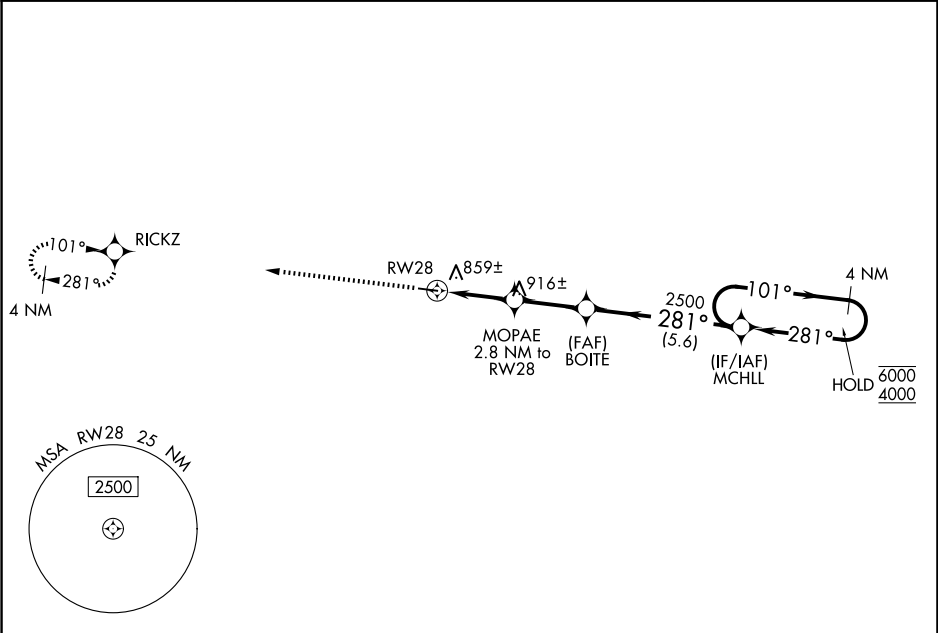

ELEV 732

TDZE 732

4000

RICKZ

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 27°).

4 NM Holding Pattern

*LNAV only.

BOITE

2500

281°

101°

6000

4000

GP 3.00° TCH 50

RW28

MOPAE 2.8 NM to RW28

1660*

2500

2.8 NM

2.6 NM

5.6 NM

CATEGORY	A	B	C	D
LPV DA	1040-1		308 (400-1)	
LNAV/VNAV DA	1178-1 ³ / ₈		446 (500-1 ³ / ₈)	
LNAV MDA	1180-1	448 (500-1)	1180-1 ³ / ₈	448 (500-1 ³ / ₈)
CIRCLING	1380-1 648 (700-1)	1480-1 748 (800-1)	1480-2 ¹ / ₄ 748 (800-2 ¹ / ₄)	1480-2 ¹ / ₂ 748 (800-2 ¹ / ₂)