ILS or LOC RWY 32R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

LOC I-JDU	APP CRS	Rwy Ldg	10000
111.15	319°	TDZE	442
		Apt Elev	459

For inop ALS, increase S-ILS 32R Cat E visibility to RVR 4000 and increase S-LOC Cat E visibility to RVR 5000.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 2400 on heading 194° and TOY VORTAC R-144 to EGNOC INT and hold.

ATIS	ST LOUIS APP CON	SCOTT TOWER	GND CON
128.7 256.7	125.2 281.5	128.25 253.5	119.2 275.8

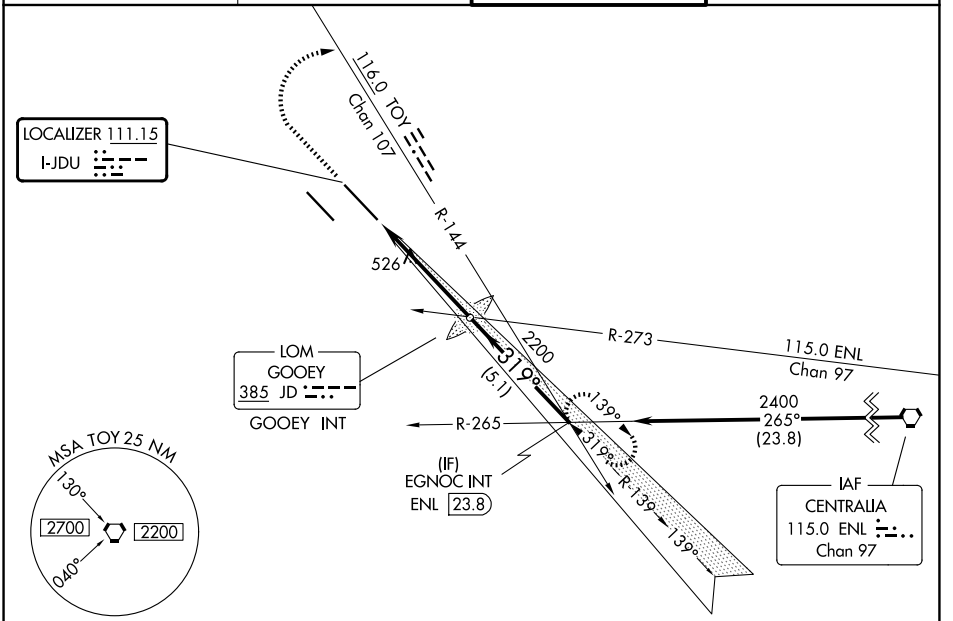

Procedure NA for arrivals on ENL VORTAC airway radials 225 CW 294.

ELEV 459 D TDZE 442



REIL Rwy 14L
HIRL Rwys 14R-32L and 14L-32R

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

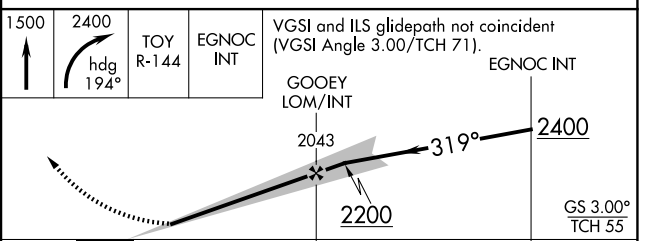

CATEGORY	A	B	C	D	E
S-ILS 32R *	642/24 200 (200-½)				
S-LOC 32R	780/24 338 (400-½)		780/26 338 (400-½)		
CIRCLING	1000-1 541 (600-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)	1240-2¾ 781 (800-2¾)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026