RNAV (RNP) Z RWY 14R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

APP CRS	Rwy Ldg	8006
138°	TDZE	459
	Apt Elev	459

RNP AR APCH - GPS. Authorization required. From WLSEN, LIBEE: RF

V A NA For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C.
For inop ALS, increase RNP 0.11 all Cats visibility to RVR 5500.
For inop ALS, increase RNP 0.15 all Cats visibility to RVR 6000.
For inop ALS, increase RNP 0.30 all Cats visibility to 1⅝ SM.

ALSF-1 (A1)

MISSED APPROACH: Climb to 3000 direct BUFFE and hold.

ATIS	ST LOUIS APP CON	SCOTT TOWER	GND CON
128.7 256.7	125.2 281.5	128.25 253.5	119.2 275.8

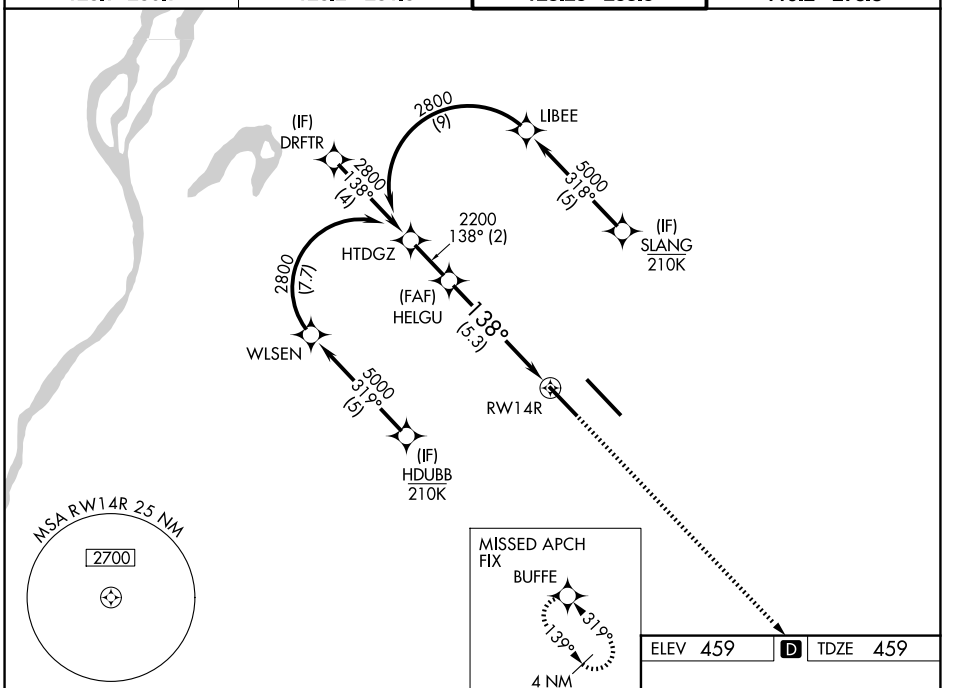

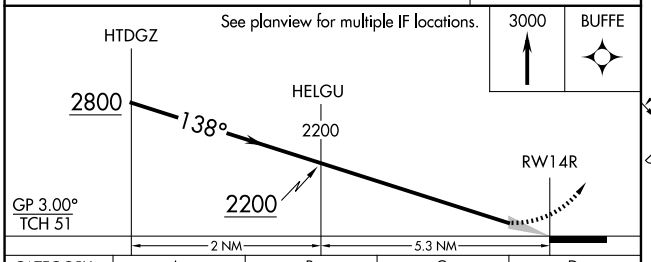

CATEGORY	A	B	C	D
RNP 0.11 DA		803/30	344 (400-⅝)	
RNP 0.15 DA		871/40	412 (500-¾)	
RNP 0.30 DA		1019/60	560 (600-1¼)	

AUTHORIZATION REQUIRED



REIL Rwy 14L
HIRL Rwys 14L-32R and 14R-32L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026