RNAV (GPS) Y RWY 14R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

WAAS	APP CRS	Rwy Ldg	8006
CH 61247	138°	TDZE	459
W14B		Apt Elev	459

RNP APCH - GPS.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1¾ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.

ALSF-1

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct NEWAT and hold.

ATIS	ST LOUIS APP CON	SCOTT TOWER	GND CON
128.7 256.7	125.2 281.5	128.25 253.5	119.2 275.8

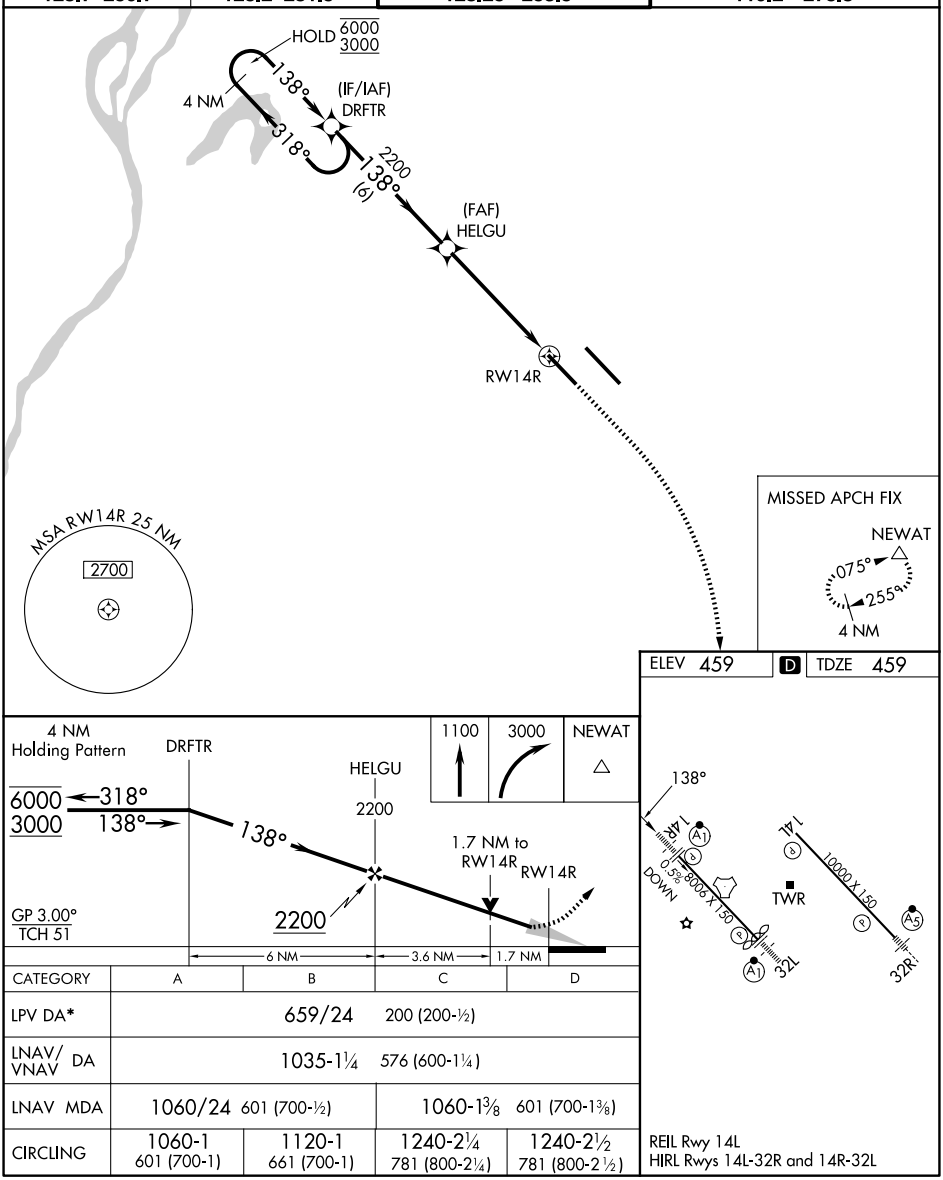

CATEGORY	A	B	C	D
LPV DA*	659/24 200 (200-½)			
LNAV/VNAV DA	1035-1¼ 576 (600-1¼)			
LNAV MDA	1060/24 601 (700-½)		1060-1⅜ 601 (700-1⅜)	
CIRCLING	1060-1 601 (700-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)

REIL Rwy 14L
HIRL Rwys 14L-32R and 14R-32L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026