# RNAV (GPS) RWY 5

MBS INTL (MBS)


| WAAS CH 82010 W05A | APP CRS 053° | Rwy Ldg 8002 | TDZE 666 | Apt Elev 668 |
|---|---|---|---|---|


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 2300 direct FOROX and hold.

| ATIS | GREAT LAKES APP CON★ | SAGINAW TOWER★ | GND CON | UNICOM |
|---|---|---|---|---|
| 125.925 | 126.45 235.625 | 120.1 (CTAF) L 257.7 | 121.7 | 122.95 |

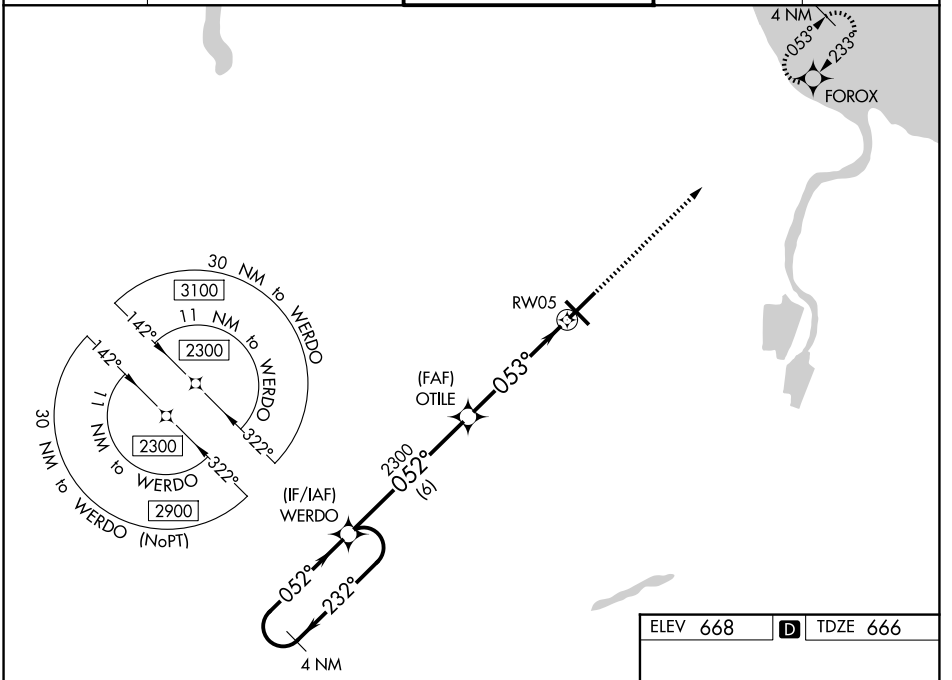

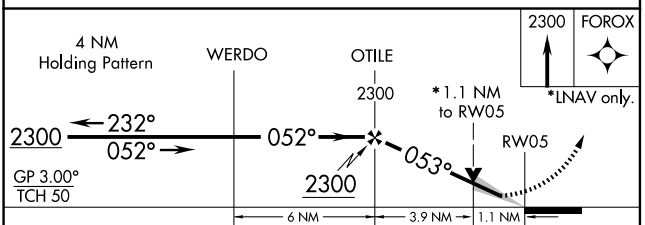
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA** | 866/24 200 (200-½) | | | |
| LNAV/VNAV DA | 955/24 289 (300-½) | | | |
| LNAV MDA | 1080/24 414 (500-½) | | 1080/40 414 (500-¾) | |
| CIRCLING | 1080-1 412 (500-1) | 1120-1 452 (500-1) | 1240-1½ 572 (600-1½) | 1240-2 572 (600-2) |

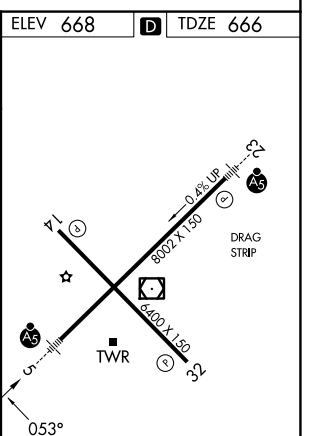


REIL Rwys 14 and 32 L
HIRL Rwys 5-23 and 14-32 L



EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026