RNAV (GPS) RWY 30

WINONA MUNI/MAX CONRAD FLD (ONA)

WAAS	APP CRS	Rwy Ldg	5199
CH 40329	300°	TDZE	656
W30A		Apt Elev	656


T A -29°C

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use La Crosse altimeter setting and increase all LPV DA to 1064 feet and visibility ⅛ mile all Cats, all LNAV/VNAV DA to 1193 and visibility ⅛ mile all Cats, and all MDA 60 feet, increase LNAV Cat C/D and Circling Cat B visibility ¼ mile. For inop ALS, increase LPV all Cats visibility to 1⅛ mile. For inop ALS when using La Crosse altimeter setting, increase LPV all Cats visibility to 1⅜ mile, and LNAV Cats C/D visibility to 2 mile. Baro-VNAV and VDP NA when using La Crosse altimeter setting.


MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 3500 direct ALEYU and hold.


AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.075	128.6 363.0	122.8 (CTAF) L

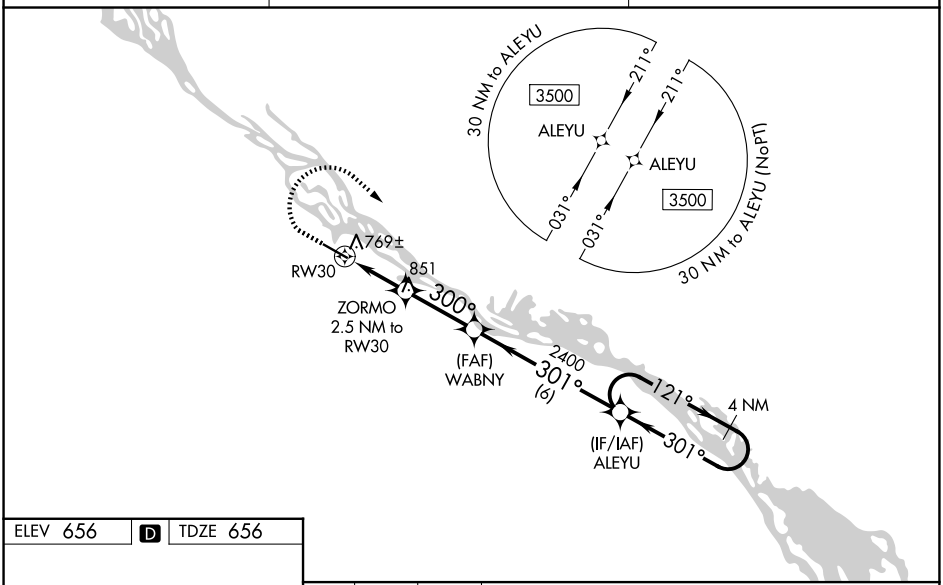

ELEV 656 D TDZE 656



REIL Rwy 12 L
MIRL Rwy 12-30 L

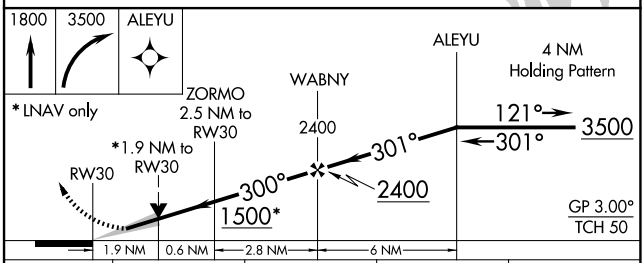

CATEGORY	A	B	C	D
LPV DA	1011-¾ 355 (400-¾)			
LNAV/VNAV DA	1140-1⅛ 484 (500-1⅛)			
LNAV MDA	1280-½ 624 (700-½)		1280-1⅜ 624 (700-1⅜)	
CIRCLING	1560-1¼ 904 (1000-1¼)	1600-1¼ 944 (1000-1¼)	1780-3 1124 (1200-3)	1980-3 1324 (1400-3)

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026