WAAS CH 82242 W17A	APP CRS 173°	Rwy Ldg 5500 TDZE 1409 Apt Elev 1409

RNAV (GPS) RWY 17


SIOUX COUNTY RGNL (SXK)


RNP APCH - GPS.


Baro-VNAV and VDP NA when using LRJ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use LRJ altimeter setting and increase: LPV and LNAV/VNAV DA to 1718 feet and all visibilities ⅛ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ⅛ SM.

MISSED APPROACH: Climb to 4500 direct SKYLE and hold, continue climb-in-hold to 4500.

AWOS-3P	SIOUX CITY APP CON ★	UNICOM
120.075	124.6 307.0	122.7 (CTAF) L

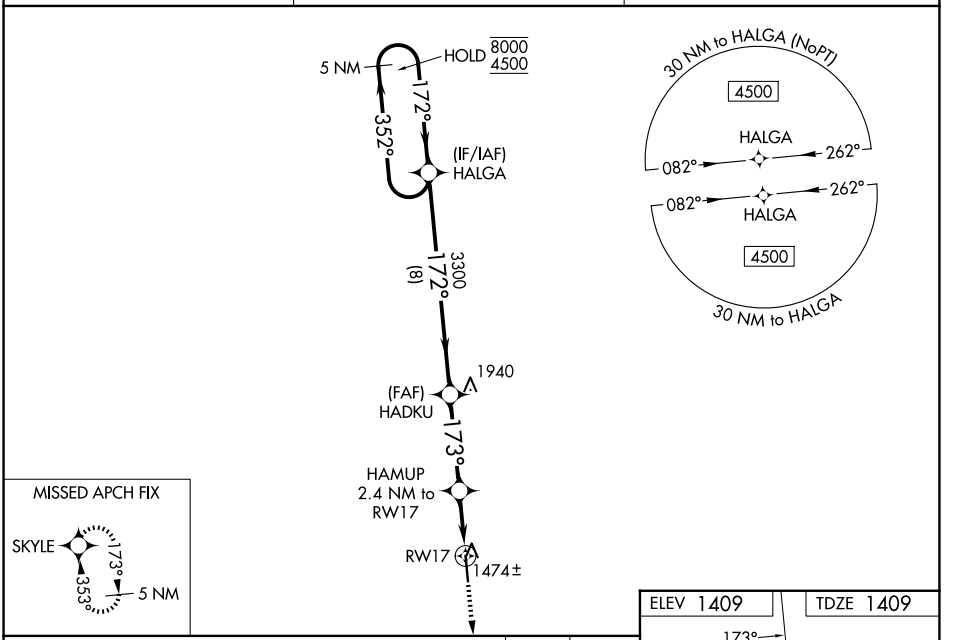

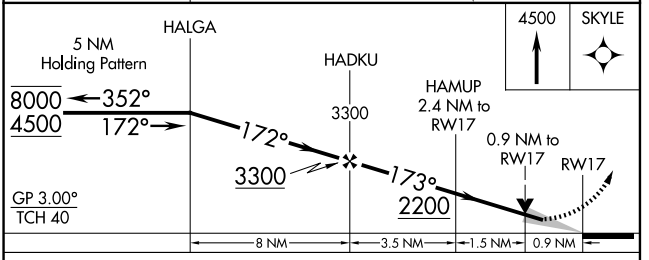

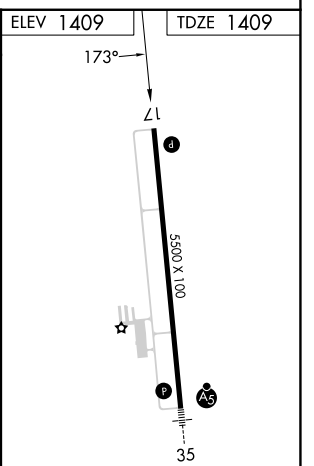

CATEGORY	A	B	C	D
LPV DA	1659-¾ 250 (300-¾)			
LNAV/VNAV DA	1659-¾ 250 (300-¾)			
LNAV MDA	1740-1 331 (400-1)			
CIRCLING	1820-1 411 (500-1)	2080-1 671 (700-1)	2080-2 671 (700-2)	2080-2¼ 671 (700-2¼)

REIL Rwy 17 L
MIRL Rwy 17-35 L

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026