# RNAV (GPS) RWY 35

SIOUX COUNTY RGNL (SXK)

| WAAS | APP CRS | | |
|---|---|---|---|
| CH **93742** | **353°** | Rwy Ldg | **5500** |
| **W35A** | | TDZE | **1409** |
| | | Apt Elev | **1409** |


RNP APCH - GPS.


T A Baro-VNAV and VDP NA when using LRJ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use LRJ altimeter setting: increase LPV DA to 1668 feet; increase LNAV/VNAV DA to 1718 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ⅛ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat C/D visibility to ⅞ SM. For inop ALS when using LRJ altimeter setting, increase LNAV/VNAV all Cats visibility to ⅞ SM, and LNAV Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 4500 direct HALGA and hold, continue climb-in-hold to 4500.


| AWOS-3P | SIOUX CITY APP CON ★ | UNICOM |
|---|---|---|
| **120.075** | **124.6 307.0** | **122.7** (CTAF) L |

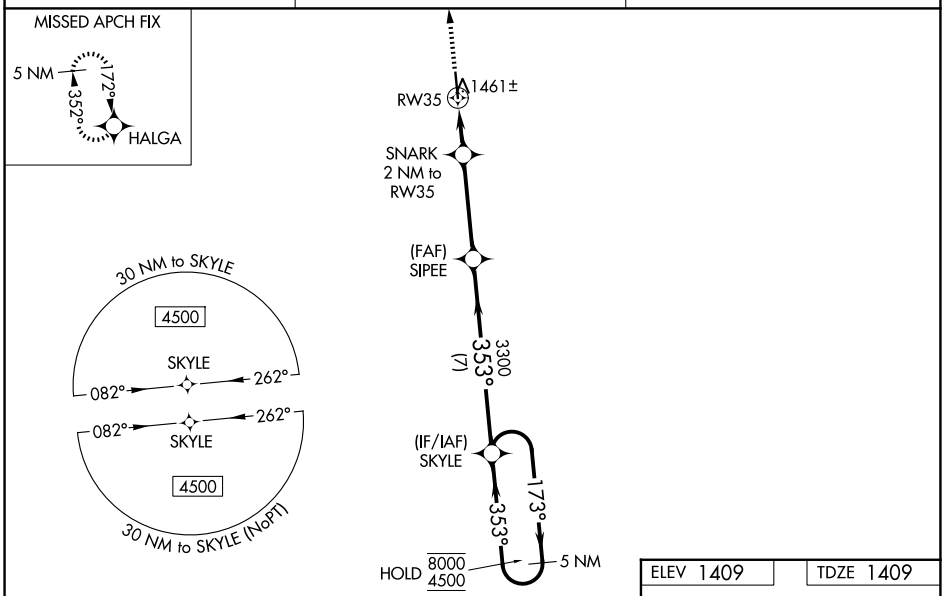

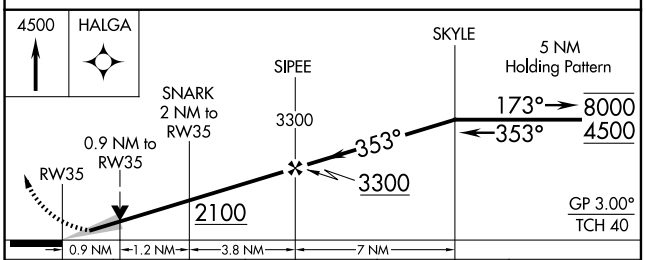
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1609-½ | 200 (200-½) | | |
| LNAV/VNAV DA | 1659-½ | 250 (300-½) | | |
| LNAV MDA | 1720-½ | 311 (400-½) | | |
| CIRCLING | 1820-1<br>411 (500-1) | 2080-1<br>671 (700-1) | 2080-2<br>671 (700-2) | 2080-2¼<br>671 (700-2¼) |

ELEV 1409 TDZE 1409

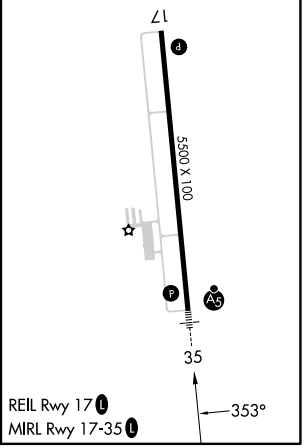


NC-3, 29 OCT 2026 to 26 NOV 2026

NC-3, 29 OCT 2026 to 26 NOV 2026